
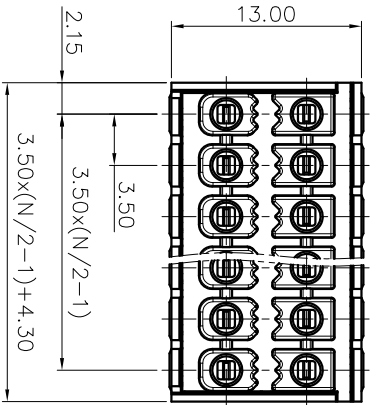
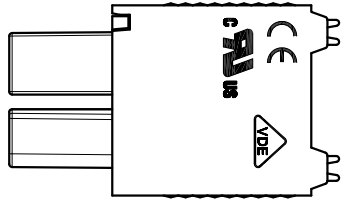
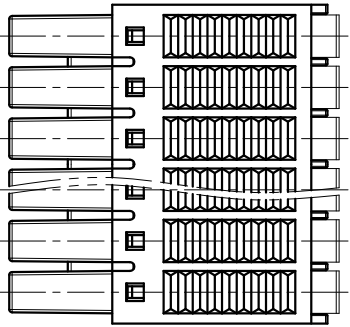
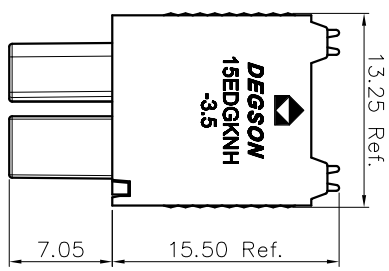


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



NOTES1:

- UL Standard
- 1.Rated voltage/current : 150V / 8A
- 2.Withstanding voltage : AC1500V/1Min.
- 3.Wire range : 26~16AWG

IEC Standard

Pollution Degree	2	2	3
Overvoltage Category	II	III	III
Rate Impulse Voltage(kV)	2.5kV	2.5kV	2.5kV
Rate Voltage(V)	320V	250V	200V
Rate Current(A)	9.5A		


- 1. Wire range : 0.2~1.5mm<sup>2</sup>

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.50mm, Poles : N=04~48P
- 3.Stripping length : 10mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm	Nominal dimension range			mm			
	Over	Over	Over				
6	TO	TO	TO	0.1/10			
10	TO	TO	TO	<			
10	24	30	60	100	150		
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

- 6.RoHS Compliance

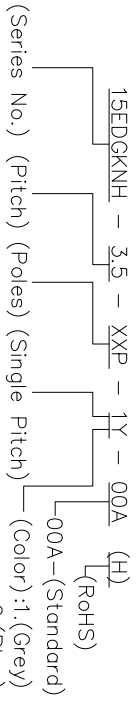

- 100A - (Standard)
- 00A - (RoHS)

<b>PART NO.:</b> /	<b>NAME:</b> NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
<b>APPD:</b> /	<b>15EDGKNH-3.5-XXP-1Y-00A(H)</b>
<b>CHKD:</b> /	<b>CUSTOMER DRAWING</b>
<b>DRFT:</b> /	<b>REV</b> DO
<b>THIRD ANGLE PROJECTION</b>	<b>SHEET</b> 1/1
<b>DO NOT SCALE DRAWING</b>	<b>SCALE</b> 1:1

DETACHED LISTS