
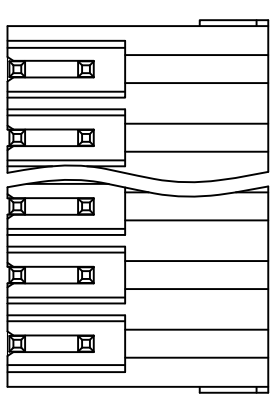
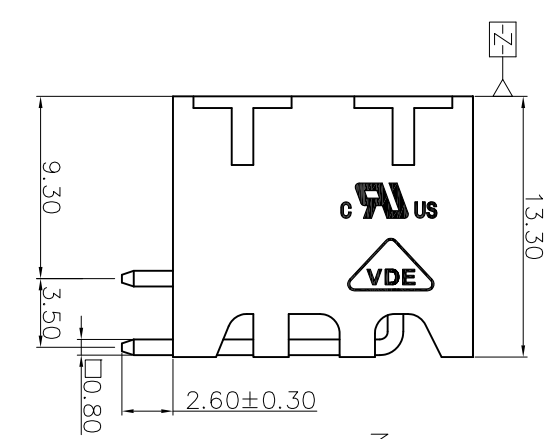
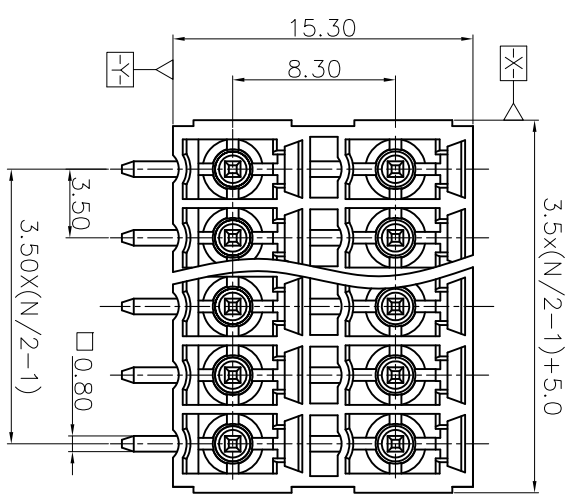
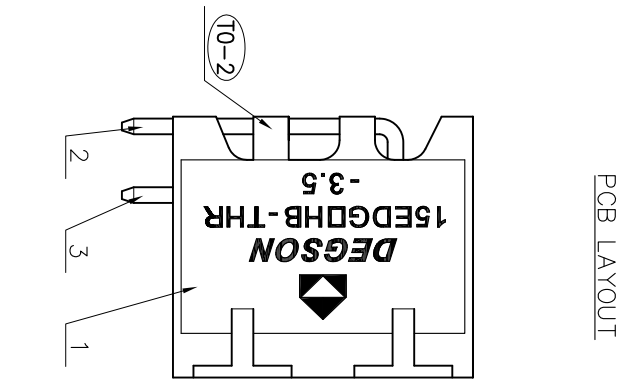
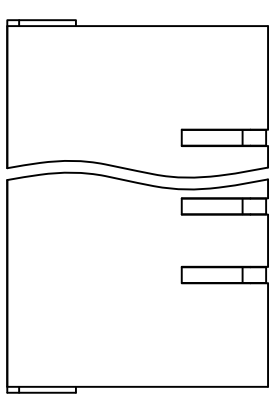


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
T0-2	15-0565	Added a row guide ribs	WL	12/19/15

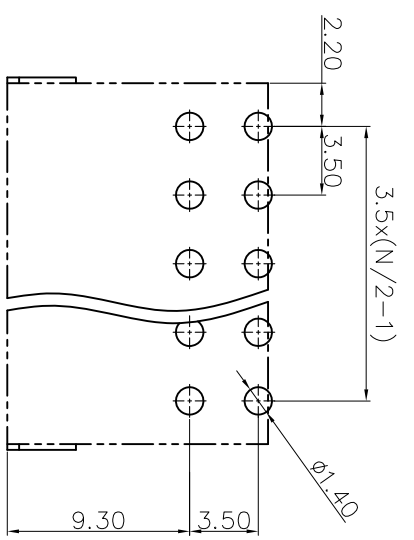

NOTES1:
 UL Standard
 1. Rated Voltage/Current : 300V / 8A
 2. Withstanding Voltage : AC1600V/1Min.
 VDE Standard
 1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	8A

NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 3.5mm, Poles : N=04~48P
 3. Operating temperature: -40°C~+130°C
 4. Undimensioned Tolerances:

Pitch Range	In		mm		Tolerance
	Over	Under	Over	Under	
6	10	TO	30	60	0.1/10
	TO	TO	TO	100	150
10	24	30	60	100	±2
	30	60	100	150	
±0.15±0.20±0.30±0.30±0.50±0.70±1.00±1.30					

5. RoHS Compliance

3	SHORT PIN	COPPER ALLOY	SN PLATED
2	LONG PIN	COPPER ALLOY	SN PLATED
1	HOUSING	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

PART NO.:		/
APPD:		
CHKD:		
DRFT:	WL	09/16/15"
DETACHED LISTS		
THIRD ANGLE PROJECTION		
NAME:	DEGSON 宁波高松电子有限公司	
	NINGBO DEGSON ELECTRICAL CO., LTD	
TITLE:	CUSTOMER DRAWING	REV TO-2
DRAWING NO.:	15EDGRHB-THR-3.5-C03	SHEET 1/1
SCALE:	DO NOT SCALE DRAWING	SCALE 1:1