D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
2		Drawing emend	WF	04/07/06"
3		增加商标、品名、UL刻字	WLM	08/06/08"
4		增加VDE,CE刻字	Zengy	01/15/09"

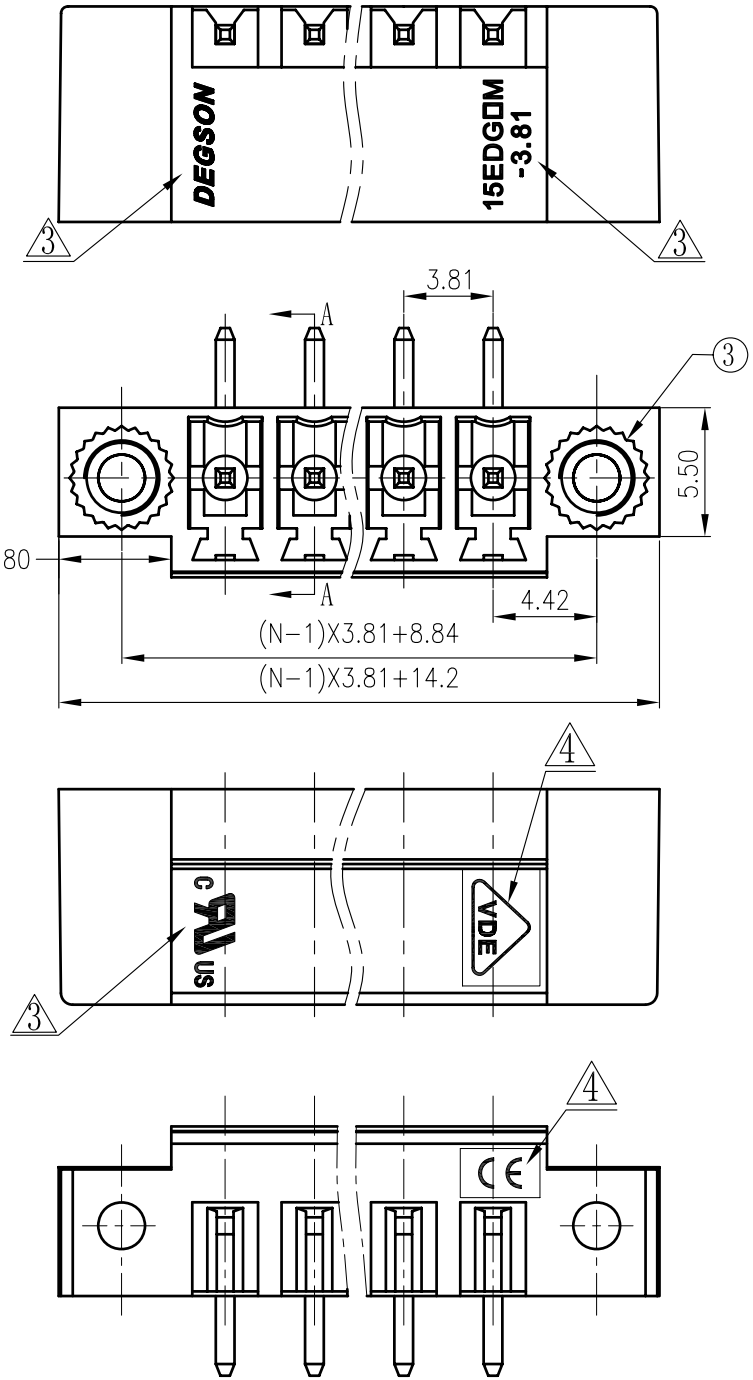

Notes:

1. Pitch: 3.81mm poles:2-24p
2. Rated voltage/current: UL 300V/8A
   VDE 250V/7A
3. Operation temperratures:-40° C～+105° C
4. Withstanding voltage: AC2000V/1Min
5. Insulation resistance:5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ / ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

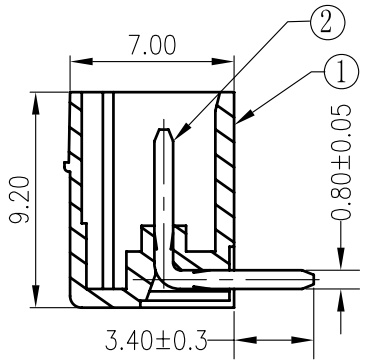

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
3	2EDG screw cap	S000000040(H)	2	Brass	
2	15EDGRC Pin header	1003B00010(H)	XX	Brass	SnCe
1	15EDGV(R)M-3.81-Housing	1004A0YXXA(H)	1	PA66	UL94V-0

DETACHED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

MM	
.0 ±	±
.00 ±	±
.000 ±	±

ANGLES ± 1°

THIRD ANGLE PROJECTION

DFTO DZJ	DATE 09/14/05"	
CHKD	DATE	
MFO	DATE	
APPVL	DATE	
MATERIAL :		
G.E :		
FINISH :		
SCALE : 1:1		

DEGSON ® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD

NAME 15EDGRM-3.81-XXP-1Y-00A(H)

DRAWING NO. 15EDGRM-3.81-E02 /PART NO.

SIZE A3 REV T4 01/15/09"

DO NOT SCALE DRAWING SHEET 1 OF 1

8 7 6 5 4 3 2 1

H G F E D C B A