

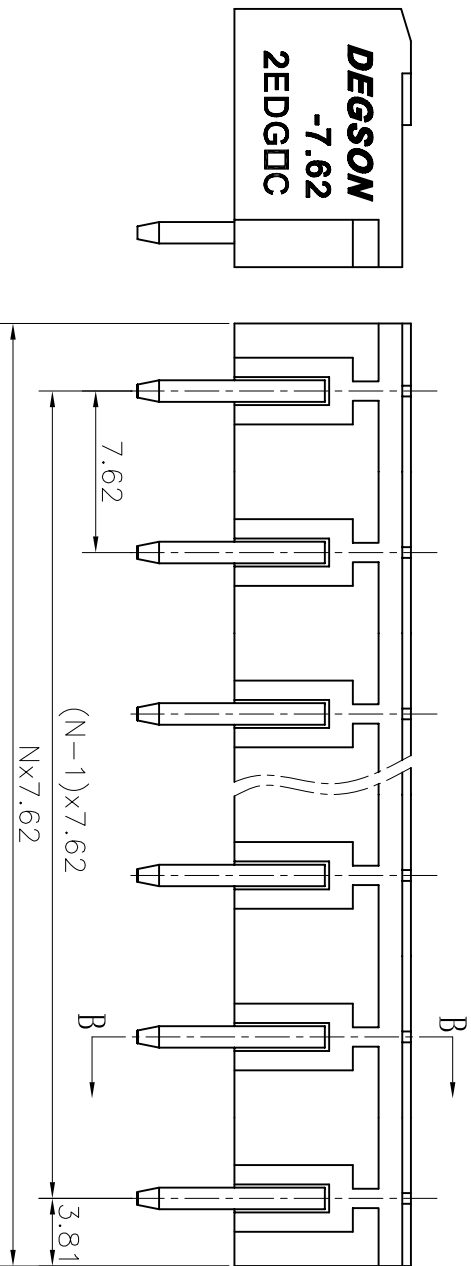


REVISION RECORD			
REV	ECO	DESCRIPTION	DATE
4	5±0.1	变更到4.0±0.3	06/14/05
3		图面更新	04/25/06
2		增加VDE、CE标志	02/27/08*
1		更新图面	04/16/08*
Δ	0-02%	增加标注尺寸	10/05/10*

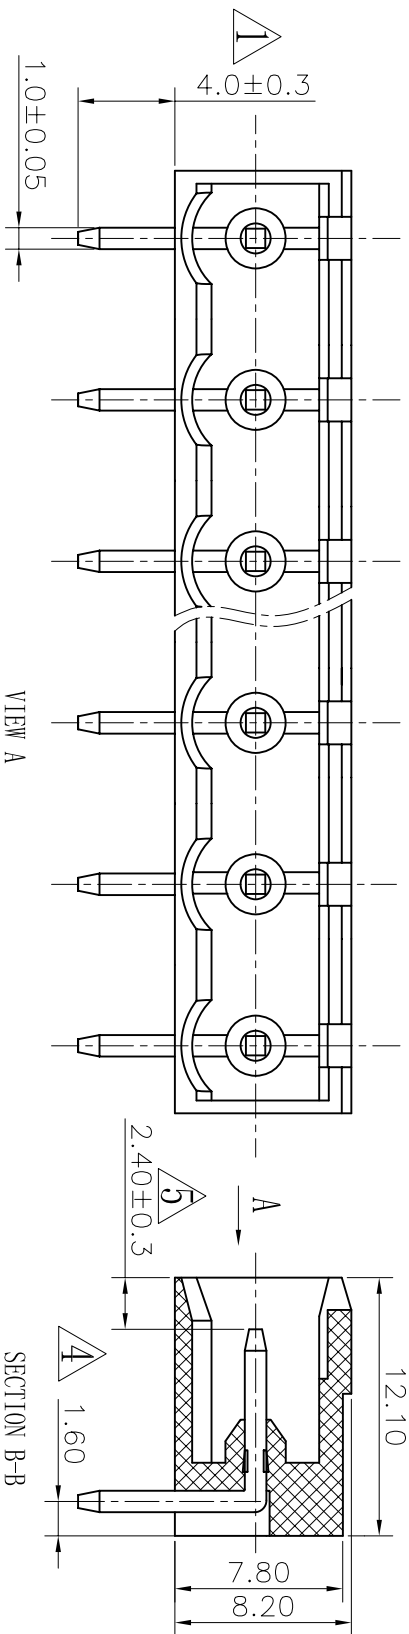

Notes:

1. Pitch: 7.62mm , Poles: 2-24P
2. Rated voltage/current: UL 300V/15A
VDE 400V/20A
3. Operation temperatures: -40°C~+105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm	Normal dimension range in mm
over 6 to 10	over 30 to 60
over 10 to 24	over 60 to 100
over 24 to 30	over 100 to 150
over 30 to 60	over 150 to 150
over 60 to 100	over 150 to 150
over 100 to 150	over 150 to 150

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
2	2EDGR Pin header	1008B00040(H)	XX	Brass	SnCe
1	2EDGRC-7.62-Housing	1023A0YXXA(H)	1	PA66	UL94V-0

DETACHED LISTS		DFTO Zhuhai		DATE 08/02/04	
TOLERANCES EXCEPT AS NOTED	MM	CHKD	DATE	MFD	DATE
ANGLES ± 1°	MM	APVL	DATE		
FINISH:	±	MATERIAL:			
SCALE: 1:1	±	G.E.:			
THIRD ANGLE PROJECTION	±	DRAWING NO. 2EDGRC-7.62-E01			
	±	/PART NO.			
	±	DO NOT SCALE DRAWING			
	±	SHEET 1 OF 1			

DEGSON® 宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
2EDGRC-7.62-XXP-1Y-00A(H)