D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		品名、料号增加环保标示"(H)"	LJH	12/11/07"
2	10-0177	增加UL刻字	Jordan.Y	06/10/10"



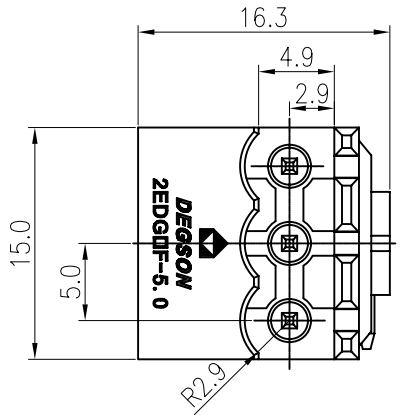







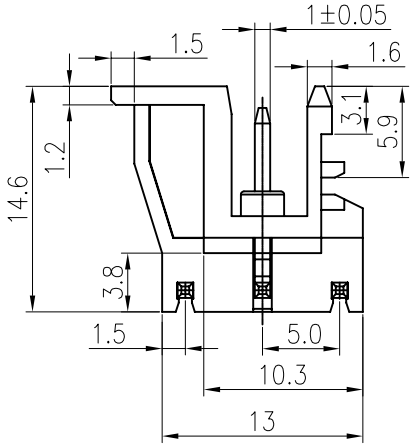



Notes:

1. pitch: 5.0mm poles:3p
2. Rated voltage: 300V
3. Rated current: 15A
4. Withstanding voltage: AC2000V/1Min
5. Insulation resistance:5000MΩ/DC1000V
6. Temp.Range: -40° C~+105° C
7. Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ / ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
1	2EDGRF-5.0-03P-Housing	1090A0Y03A(H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
4	2EDGLF-5.0 pin3	1090B00060(H)	1	Brass	SnCe
3	2EDGRF-5.0 pin1	1090B00010(H)	1	Copper	SnCe
2	2EDGLF-5.0 pin2	1090B00050(H)	1	Brass	SnCe

DETACHED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

MM
.0 ±
.00 ±
.000 ±

ANGLES ± 1°

THIRD ANGLE PROJECTION

DFTO Yangys	DATE 05/07/07"	
CHKD	DATE	
MFO	DATE	
APPVL	DATE	
MATERIAL :		
G.E :		
FINISH :		
SCALE : 1:1		

DEGSON®

宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
2EDGRF-5.0-03P-1Y-00A(H)

DRAWING NO. 2EDGRF-5.0-E03
/PART NO.

SIZE A3

REV T2 06/10/10"

DO NOT SCALE DRAWING

SHEET 1 OF 1

8 7 6 5 4 3 2 1

H G F E D C B A