
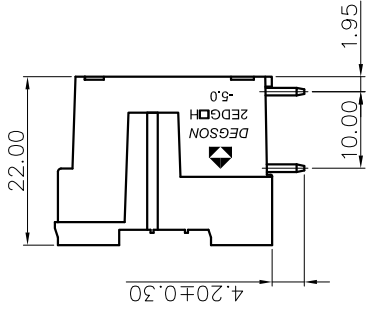
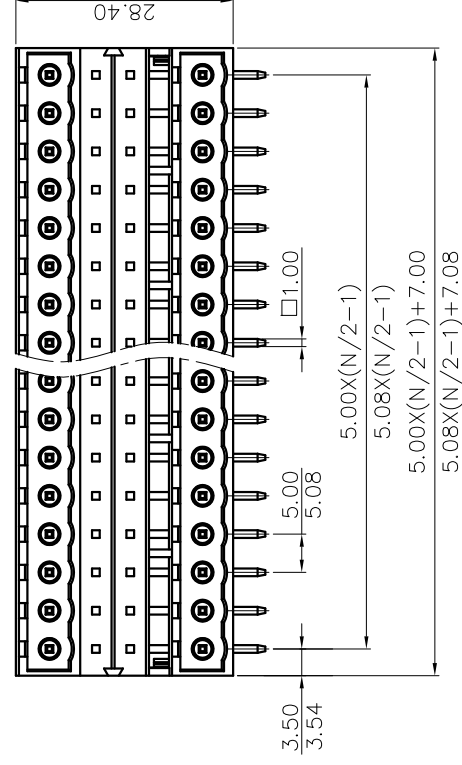



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE





NOTES1:
UL Standard
1.Rated voltage/current : 300V / 15A
2.Withstanding voltage : AC1600V/1Min.
IEC Standard

Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	10A

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 5.0/5.08mm, Poles : N=04~48P
3.Operating temperature: -40°C~+105°C
4.Undimensioned tolerances:

Pitch range in mm	Nominal dimension		Tolerance
	Over	Over	
6 TO 10	6 TO 10	30 TO 60	0.1/10
10 TO 24	10 TO 24	30 TO 60	0.1/10
24 TO 30	24 TO 30	60 TO 100	±0.15
30 TO 60	30 TO 60	60 TO 100	±0.30
60 TO 100	60 TO 100	100 TO 150	±0.50
100 TO 150	100 TO 150	100 TO 150	±0.70
150 TO 200	150 TO 200	100 TO 150	±1.00
200 TO 300	200 TO 300	100 TO 150	±1.30

5.RoHS Compliance

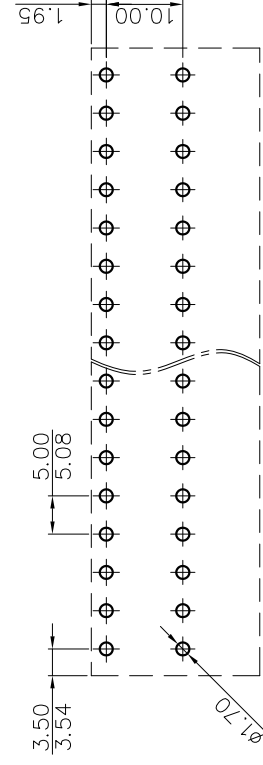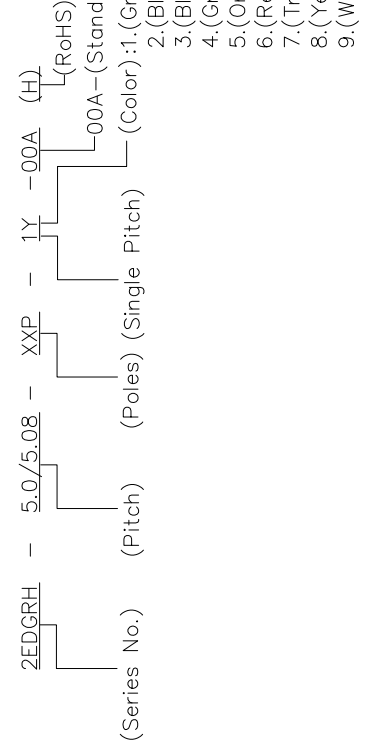

PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME: 2EDGRH-5.0/5.08-XXP-1Y-00A(H)
CHKD:	/	TITLE: CUSTOMER DRAWING
DRFT:	/	DRAWING NO. / REV DO
THIRD ANGLE PROJECTION		SCALE 1:1
DO NOT SCALE		DRAWING SCALE 1:1

PCB LAYOUT

DETACHED LISTS