

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 15A
2. Withstanding voltage : AC1600V/1Min.
3. Wire range : 22~14AWG

IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A


2. Wire range : 0.2~2.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.00mm, Poles : N=02~24P
3. Stripping length : 7~8mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range			
	Over	TO	TO	Over
6	10	30	60	100
10	10	30	60	150
15	10	24	60	150
±0.15	±0.20	±0.30	±0.50	±0.70
				±1.00
				±1.30
				±2'

6. RoHS Compliance

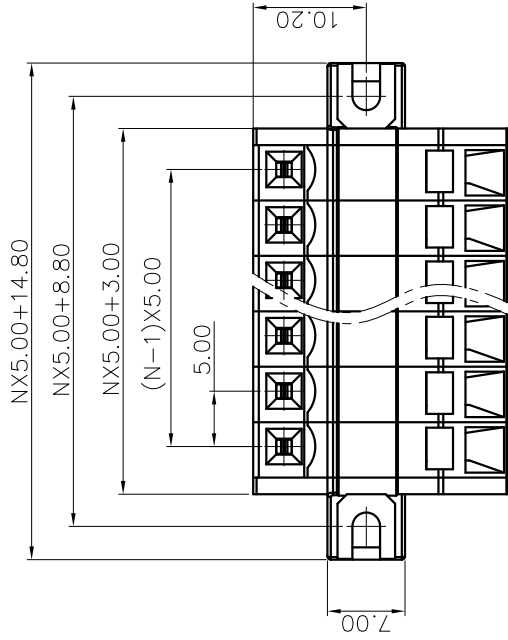




8EDG-STDM - 5.0 - XXP - 1Y - 00A (H)

(RoHS)

00A - (Standard)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color):

1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

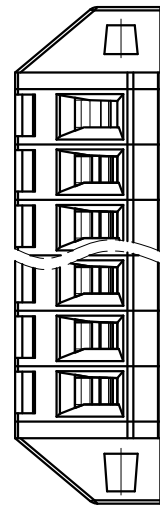

PART NO.: /	NINGBO DEGSON ELECTRICAL CO., LTD
APPD: /	NAME: 宁波高松电子有限公司
CHKD: /	8EDG-STDM-5.0-XXP-1Y-00A(H)
DRFT: /	TITLE: CUSTOMER DRAWING
THIRD ANGLE PROJECTION	DRAWING NO.: /
DETAILED LISTS	DO NOT SCALE
	SCALE 1:1