


REVISION RECORD		
REV	ECN	DATE

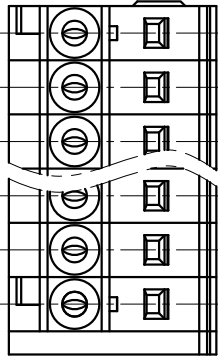

02P

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 10A
- 2. Withstanding voltage : AC1600V/1Min.
- 3. Wire range : 28~14AWG


IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	130V
Rate Current(A)	10A

2. Wire range : 0.2~1.5mm<sup>2</sup>

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.5/3.81mm, Poles : N=02~24P
- 3. Stripping length : 6~7mm
- 4. Operating temperature : -40°C~+105°C
- 5. Undimensioned tolerances:





$$3.5X(N-1)+3.5$$

$$3.81X(N-1)+3.81$$



$$3.5X(N-1)$$

$$3.81X(N-1)$$

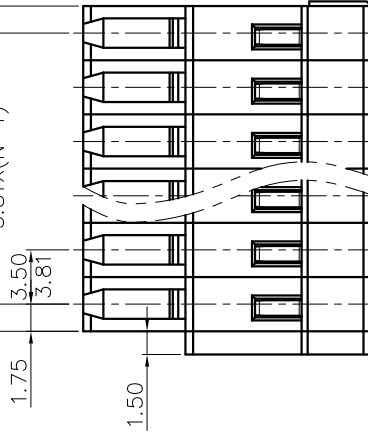

Pitch range in mm		Nominal dimension range in mm		
Over	To	Over	To	
6	10	30	60	0.1/10
10	24	30	60	100
6	10	30	60	100
±0.15	±0.20	±0.30	±0.50	±0.70 ±1.00 ±1.30
±2°				

6. RoHS Compliance

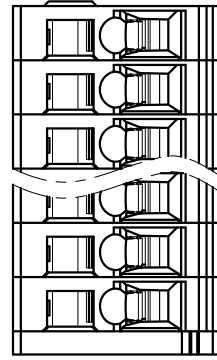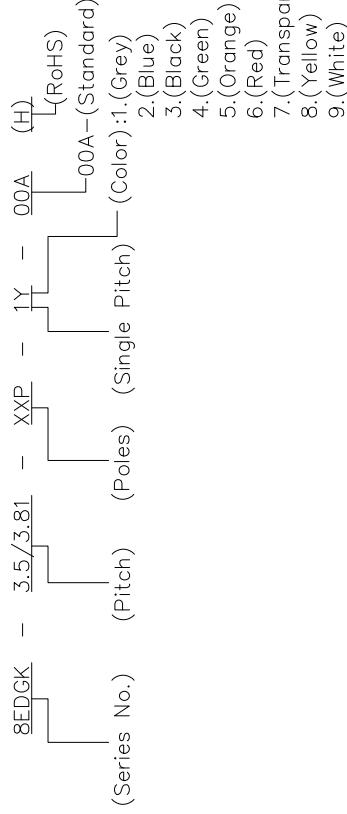

PART NO.:	/	DEGSON®	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME:	8EDGK-3.5/3.81-XXP-1Y-00A(H)
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	
THIRD ANGLE PROJECTION		DO NOT SCALE	DRAWING SCALE
1:1		1:1	1:1

DETACHED LISTS