REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

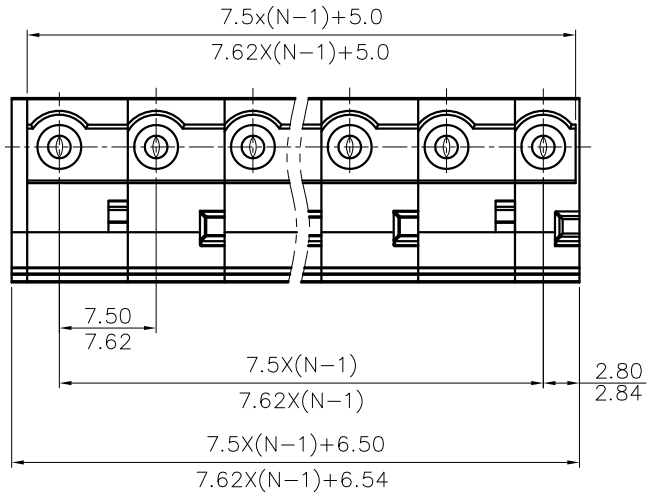

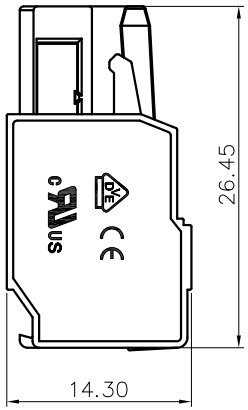

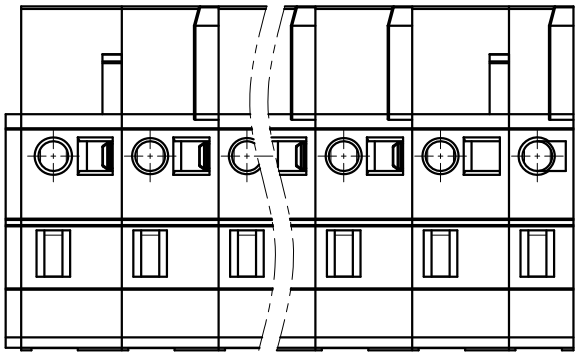

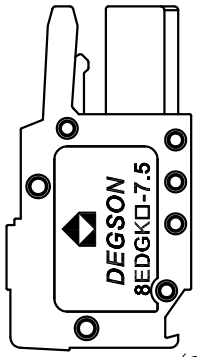

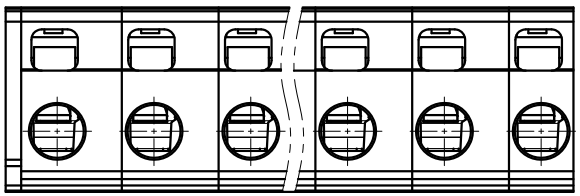



02P



03P

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 15A

2.Withstanding voltage : AC1600V/1Min.

3.Wire range : 22~14AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	20A

2.Wire range : 0.2~2.5mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5−2009

2.Pitch : 7.5/7.62mm, Poles : N=02~12P

3.Stripping length : 8~9mm

4.Operating temperature: −40°C~+105°C

5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm						—	⌒	▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150		0.1/10		
									∠		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30		±2°		

6.RoHS Compliance

8EDGK − 7.5/7.62 − XXP − 1Y − 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color) 00A (Standard) (H) (RoHS)

(Color):
1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS			
PART NO.: /	DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
APPD: /	NAME: 8EDGK-7.5/7.62-XXP-1Y-00A(H)		
CHKD: /			
DRFT: /	TITLE: CUSTOMER DRAWING	REV	D0
THIRD ANGLE PROJECTION	DRAWING NO.: /	SHEET	1/1
	MM (INCH) DO NOT SCALE DRAWING	SCALE	1:1