
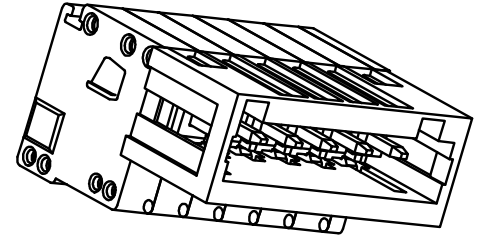
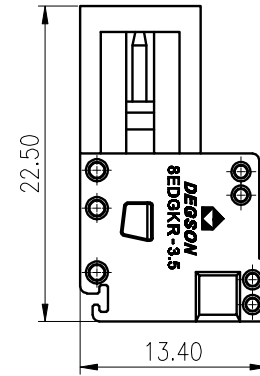
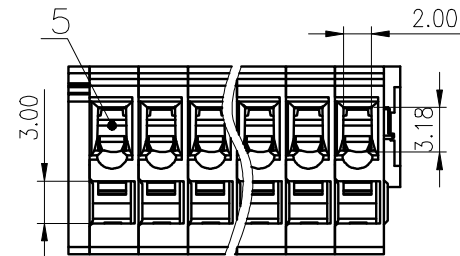
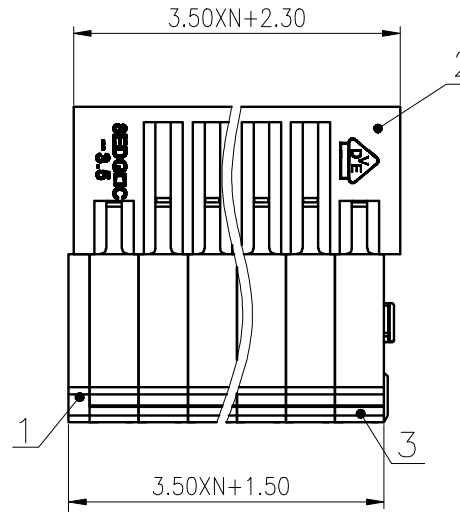
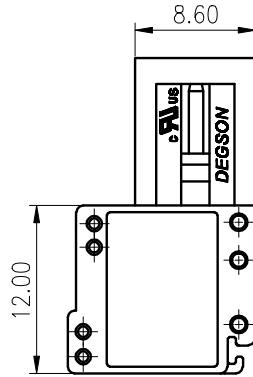


A
B
C
D

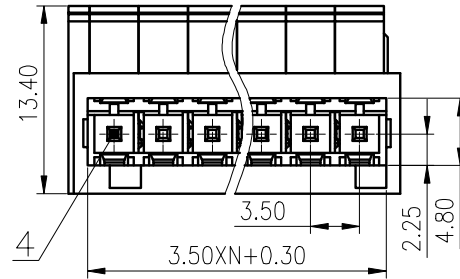

PITCH RANGE IN MM		NOMINAL DIMENSION RANGE IN MM				-
TO 6	OVER 6 TO 10	OVER 10 TO 24	TO 30	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150
±0.10		±0.15	±0.25	±0.20	±0.30	±0.50
					±0.70	±1.00
						0.05/10

5	Spring	Stainless Steel		
4	Pin	Copper	Sn Plated	
3	Housing-2	PA66	UL94V-0	
2	Housing-1	PA66	UL94V-0	
1	Cover	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:				
额定电压/电流/Rated Voltage(V)/Current(A)	300/10		B	C
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	130/10			
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	2.5			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~1.5/28~14		
间距/Pitch(mm)/线数范围/Poles	3.5/N=02~24P			
剥线长度/Stripping length(mm)	10			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS环保要求/Conform to RoHS	Yes			
标准颜色编号/Standard color number:	PANTONE	PANTONE 7534U		

MATERIAL: /	SURFACE: /		
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD:	NAME:		
CHKD:	8EDGKR-3.5-XXP-11-01A(H)		
DRFT: XieZhP 2020.06.08	DRAWING NO.: 8EDGKR-3.5-C02	REV	TO
⊕	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1
		SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE