
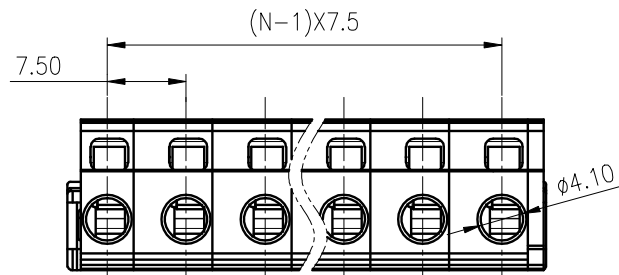
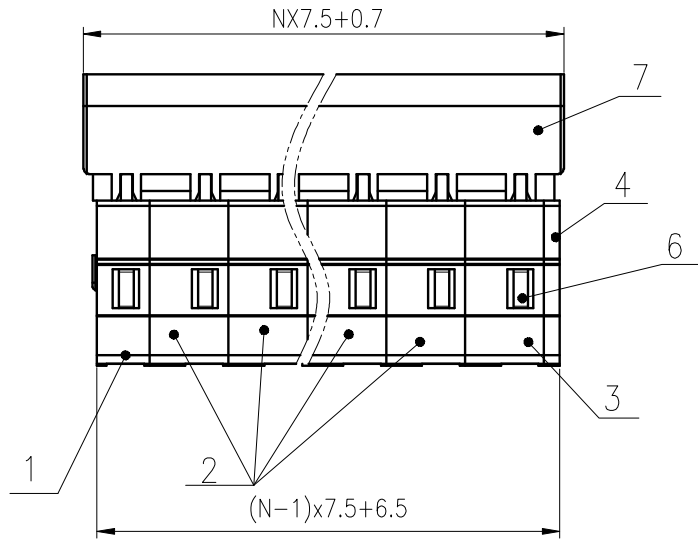


A



B

C

D

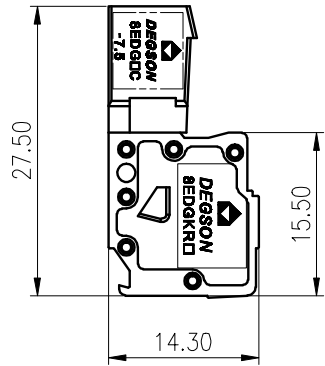

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				-
TO 6	OVER 6 TO 10	OVER 10 TO 24	TO 30	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00

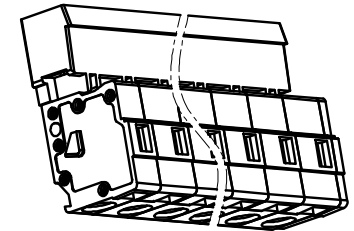

ITEM	NAME OF PART	MATERIAL	UL94V-0
7	Housing3	PA66	UL94V-0
6	Spring	Stainless Steel	
5	Pin	Copper	Sn Plated
4	Cover	PA66	UL94V-0
3	Side Housing2	PA66	UL94V-0
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电流 /Rated Voltage(V)/Current(A)	300/15	300/15	300/15
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category /污染等级 /Pollution Degree	III/3	III/2	II/2
额定电压/电流 /Rated Voltage(V)/Current(A)	/	400/20	/
额定脉冲电压 (KV) /Rate Impulse Voltage (KV)	/	4	/
线径范围 (硬线和软线) /Wire Range (rigid and flexible) (mm <sup>2</sup> /AWG)	0.2~2.5/22~14		
间距 /Pitch (mm) /线数范围 /Poles	7.5/N=02~12P		
剥线长度 /Stripping length (mm)	10		
使用温度范围 /Operating temperature (°C)	-40~+105		
符合RoHS环保要求 /Conform to RoHS	Yes		
标准颜色编号 /Standard color number:	PANTONE 7534U		

MATERIAL: /	SURFACE: /		
MAT NO.: /	<b>宁波高松电子有限公司</b> <b>NINGBO DEGSON ELECTRICAL CO., LTD</b>		
STATUS: /			
APPD:	NAME: <b>8EDGKR-7.5-XXP-11-01A(H)</b>		
CHKD:	DRAWING NO.: 8EDGKR-7.5-C01		
DRFT: XieZhP 2020.06.04	REV	TO	
SIZE: A4                  mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6