

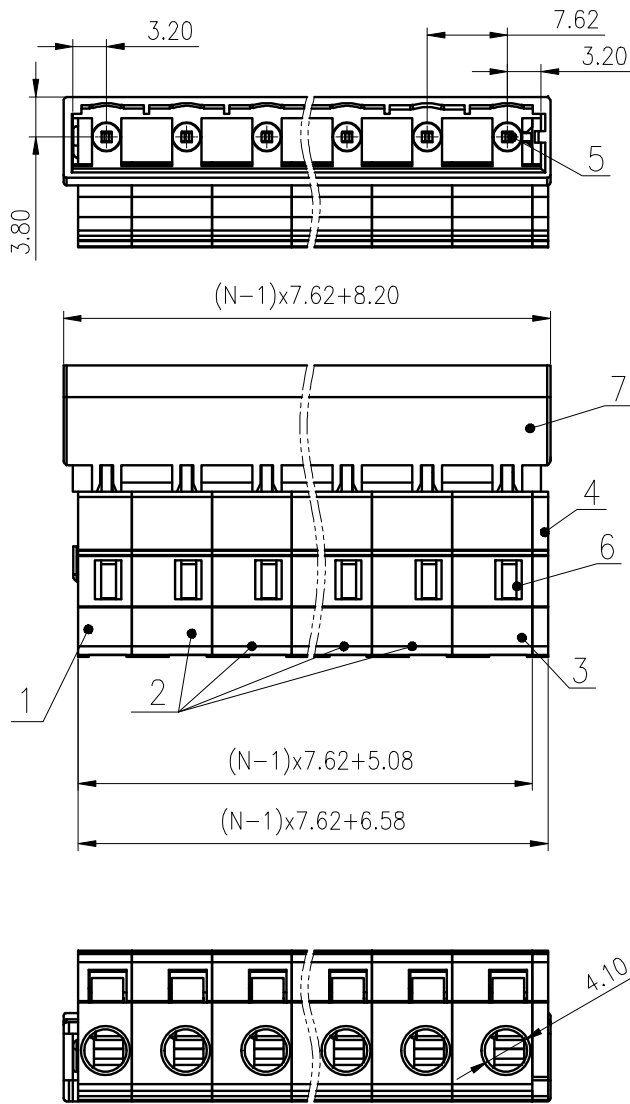


A
B
C
D

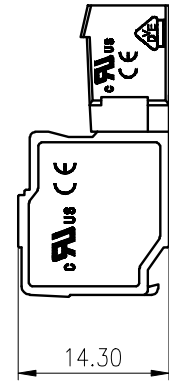

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				-
TO 6	OVER 6 TO 10	OVER 10 TO 24	TO 30	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00

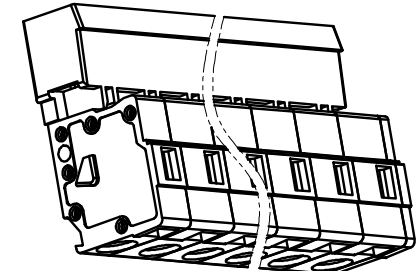

7	Housing3	PA66	UL94V-0
6	Spring	Stainless Steel	
5	Pin	Copper	Sn Plated
4	Cover	PA66	UL94V-0
3	Side Housing2	PA66	UL94V-0
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)	300/15		300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2 II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	400/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/22~14		
间距/Pitch(mm)/线数范围/Poles	7.62/N=02~12P		
剥线长度/Stripping length(mm)	10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	PANTONE 7534U		

MATERIAL: /	SURFACE: /		
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD:			
CHKD:			
DRFT: XieZhP 2020.06.04	NAME: 8EDGKR-7.62-XXP-11-01A(H)	DRAWING NO.: 8EDGKR-7.62-C02	REV TO
⊕	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 3:2 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE