
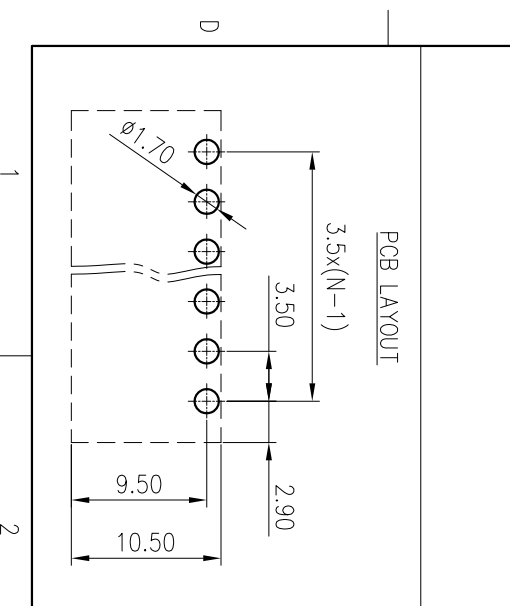

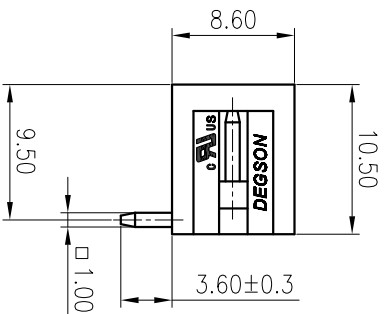


0	~	>3	~	>6	~	>10	~	>18	~	>30	~	>50	~	>80	~	>120	~	>180	~	>250	~	>315	~	>400	0.1/1.0	
~	3	~	6	~	10	~	18	~	30	~	50	~	80	~	120	~	180	~	250	~	315	~	400	~	500	±Z
公差/General Tolerances(mm)																										
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.06 ±1.15 ±1.60 ±2.20 ±2.50																										

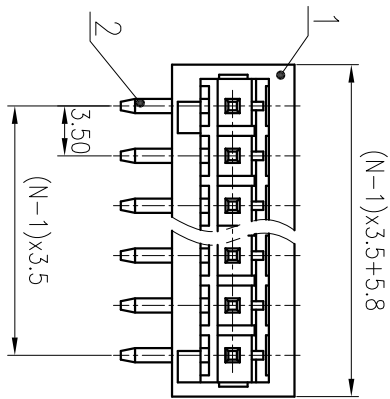

2	Pin	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 /UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/10	/	300/10
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3		
额定电压/电流/Rated Voltage(V)/Current(A)	130/10		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5		
螺丝扭矩/Torque Tightening(N.m/Lb.in)	/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	/		
间距/Pitch(mm)/线数范围/Poles	3.5/02~24P		
剥线长度/Stripping length(mm)	/		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	PANTONE 7534U		
PANTONE / RAL			
MATERIAL:	SURFACE: /		
MAT NO.:	/		
STATUS:	/		
APPD:	NAME: DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
CHKD:	DRAWING NO.: 10001577		
DRFT: ZhuYYP2020.03.17	TYPE: CUSTOMER DRAWING		SCALE: 2:1 SHEET 1/1