

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- UL Standard
- 1.Rated voltage/current : 300V / 8A

IEC Standard




- 1.Rated voltage/current : 250V / 10A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.5/3.81mm, Poles : N=01~24P
- 3.Withstanding voltage : AC2000V/1Min
- 4.Operating temperature : -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range			
Over	TO	Over	TO		
6	10	30	60	100	150
TO	TO	TO	TO	TO	TO
6	10	24	30	60	100
±0.15±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±1.00	±1.30	±2*			

6.RoHS Compliance

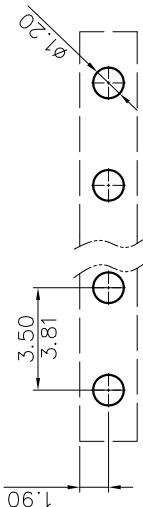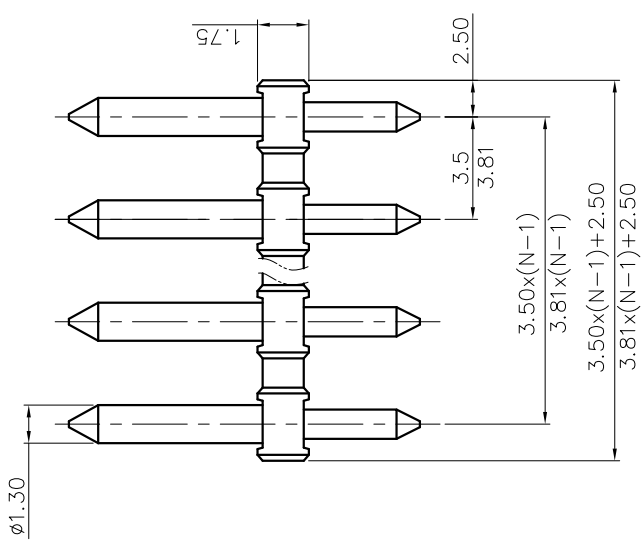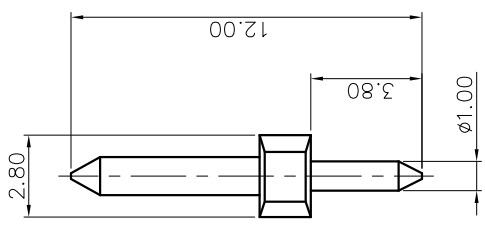

TOP VIEW-LAYOUT

DG333J - 3.5/3.81 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

PART NO.: /		NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: /	NAME: NINGBO DEGSON ELECTRICAL CO., LTD		
CHKD: /	NAME: DG333J-3.5/3.81-XXP-1Y-00A(H)		
DRFT: /	TITLE: CUSTOMER DRAWING		
THIRD ANGLE PROJECTION	DRAWING NO.: /		REV DO
	MM (INCH)		SHEET 1/1
DO NOT SCALE		DRAWING SCALE	1:1

DETACHED LISTS