
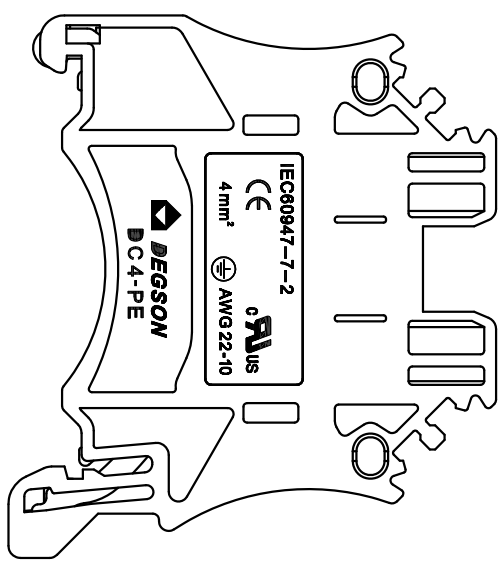

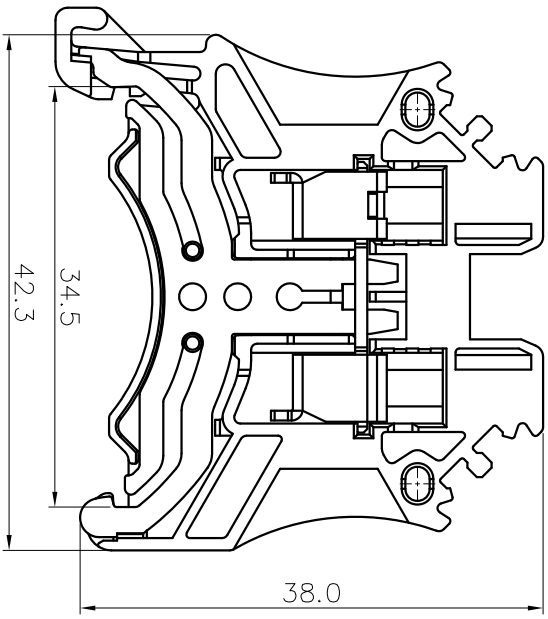


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



NOTE1:

- UL Standard
  - 1.Torque value : M3 , 4.43Lb.in
  - 2.Wire range : 22~10AWG
- IEC Standard
- 1.Torque value : M3 , 0.5N·m
  - 2.Wire range : 0.5~4mm²

NOTE2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 6.1mm, Poles : N=01P
- 3.Stripping length : 8~9mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch Range		Nominal Dimension		Range		Tolerance	
mm	In	mm	In	mm	In	mm	In
Over	6	Over	10	Over	30	Over	100
TO	10	TO	24	TO	60	TO	150
6	10	30	50	100	150	±0.15	±0.20
		±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6. RoHS Compliance

DC4-PE - 01P - 1C - 00A (H)  
 (Series No.) (Poles) (Single Pitch) (Color):1.(Grey)  
 2.(Blue)  
 3.(Black)  
 4.(Green)  
 5.(Orange)  
 6.(Red)  
 7.(Transparent)  
 8.(Yellow)  
 9.(White)  
 C.(Yellow and green)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	DC4-PE-01P-1C-00A(H)
CHKD:	/	DRAWING NO.:	/
DRFT:	/	CUSTOMER DRAWING	REV DO
THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	SCALE	1:1

A 8 7 6 5 4 3 2 1