
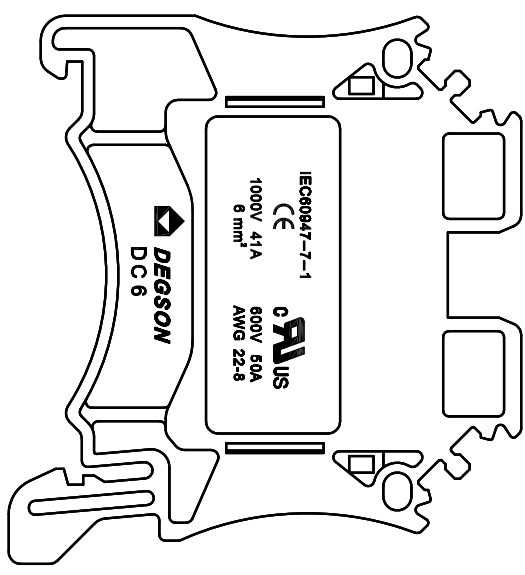

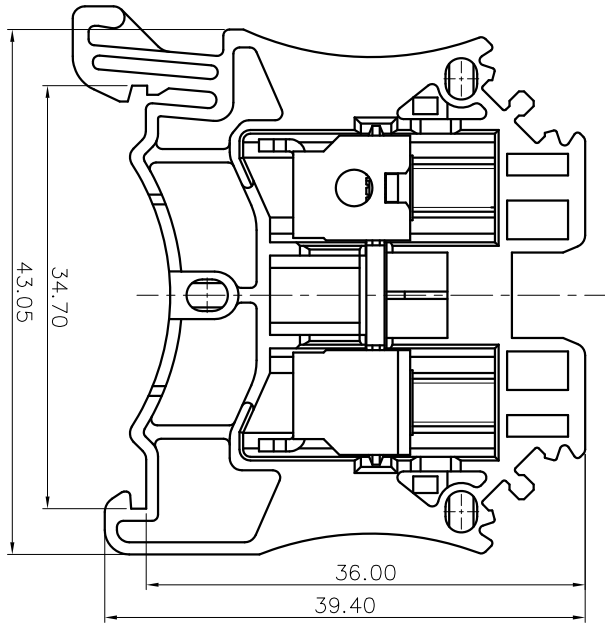


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

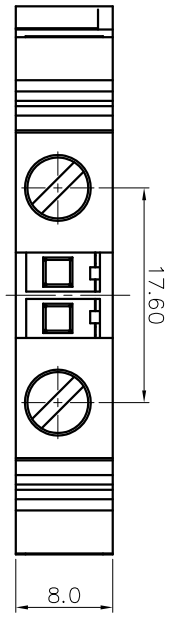

- NOTES1:
UL Standard
1. Rated voltage/current : 600V / 50A
2. Withstanding voltage : AC2200V/1Min.
3. Torque value : M4 , 10.53Lb.in
4. Wire range : 22~8AWG
- IEC Standard
1. Pollution degree : 3
Overvoltage category : III
Rate impulse voltage(kV) : 8kV
Rate voltage(V) : 1000V
Rate current(A) : 41A
2. Torque value : M4 , 1.2N·m
3. Wire range : 0.5~6mm²

NOTES2:

- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 8.0mm, Poles : N=01P
- Stripping length : 10~12mm
- Operating temperature: -40°C~+105°C
- Undimensioned tolerances:

Pitch Range	Nominal Dimension Range					
	mm	In	mm	In	mm	In
Over	6	10	30	60	100	150
TO	10	10	30	60	100	150
TO	10	24	30	60	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±1.00	±1.30	±2.0	±2.0	±2.0	±2.0	±2.0

6:RoHS Compliance

DC6 - 01P - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color) : 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	

NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
REV	DO
SHEET	1/1
SCALE	1:1

