
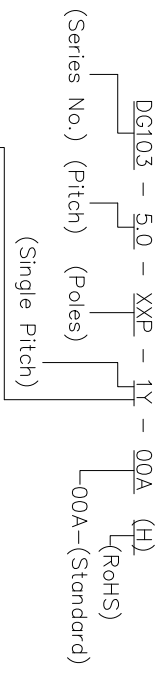
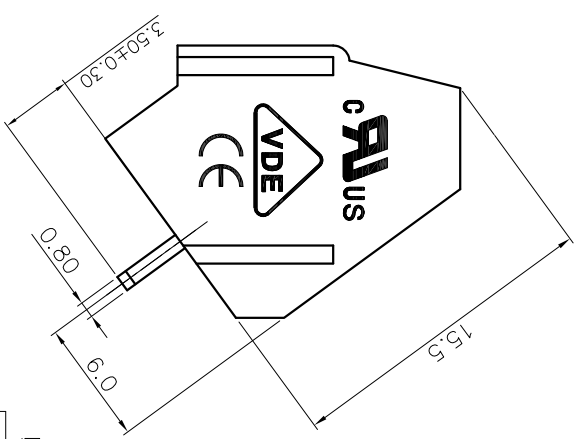
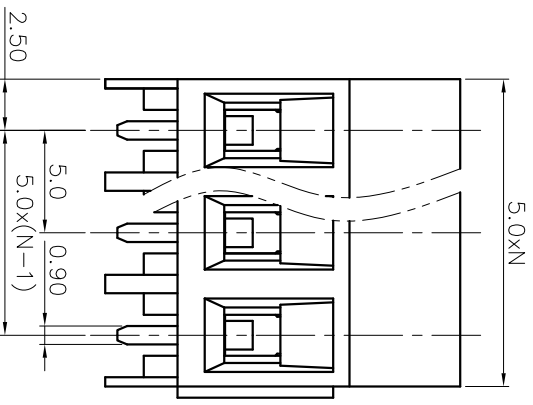


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



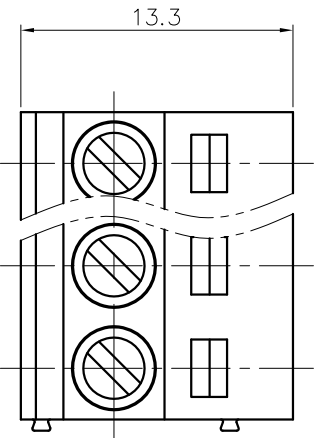


(Color): 1.(Grey)2.(Blue)3.(Black)4.(Green)5.(Orange)  
 6.(Red)7.(Transparent)8.(Yellow)9.(White)

- NOTES1:  
 UL Standard  
 1. Rated Voltage/Current : 300V / 20A  
 2. Torque Value : M2.5 , 3.54Lb.in  
 3. Wire Range : 24~12AWG
- IEC Standard  
 1. Rated Voltage/Current : 250V / 24A  
 2. Torque Value : M2.5, 0.4N.m  
 3. Wire Range : 2.5mm<sup>2</sup>
- NOTES2:  
 1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 5.0mm, Poles : N=02~24P  
 3. Stripping length : 5~6mm  
 4. Withstanding Voltage : AC2000V/1Min.  
 5. Operating temperature: -40°C~+105°C  
 6. Undimensioned Tolerances:

Pitch	range	in mm	Nominal dimension	range	in mm	Over	Under
6	TO	10	30	60	100	130	0.1/10
8	TO	24	30	60	100	150	<
10	TO	30	60	100	150		
15	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
1.00	±1.00	±1.30					±2

7. RoHS Compliance

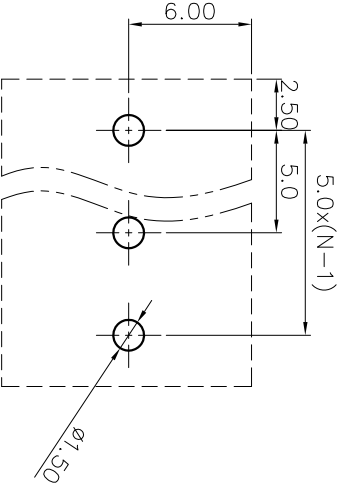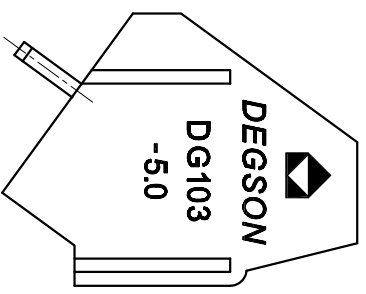

DETACHED LISTS			
PART NO.:	/	NAME:	<b>DEGSON</b> NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1