
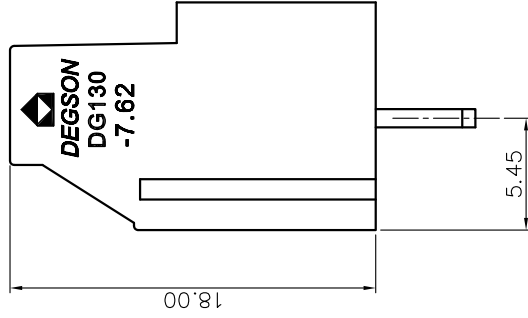
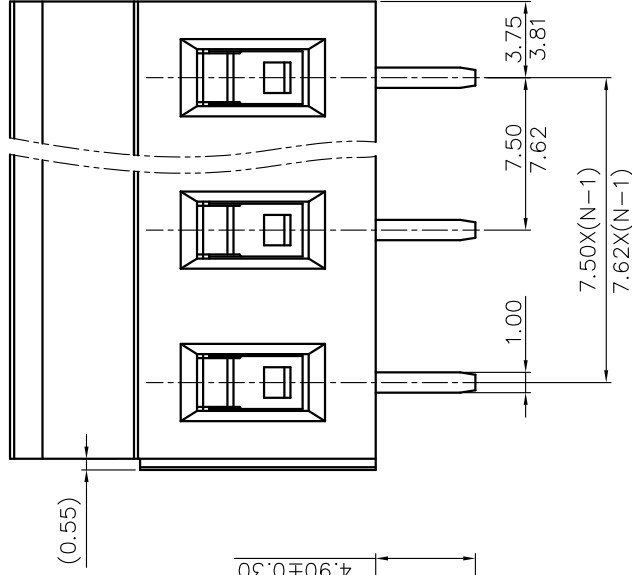
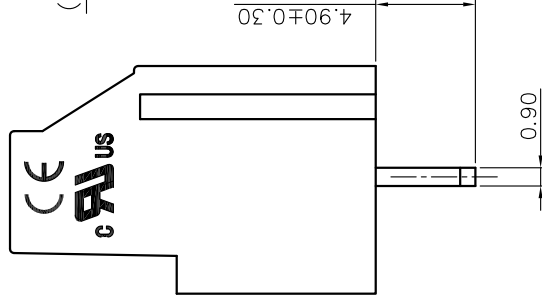


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

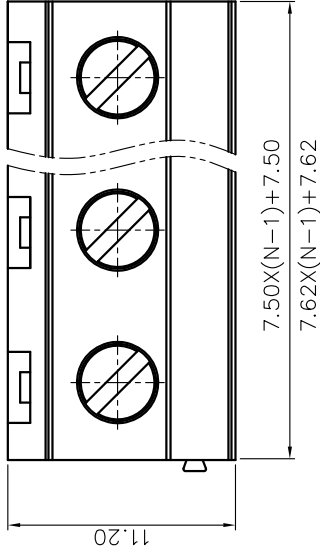

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 20A
- 2. Torque value : M3, 4.43lb.in
- 3. Wire range : 26~12AWG

IEC Standard

- 1. Rated voltage/current : 450V / 20A
- 2. Torque value : M3, 0.5N·m
- 3. Wire range : 0.5~2.5mm²


NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 7.50/7.62mm, Poles : N=02~24P
- 3. Stripping length : 6~7mm
- 4. Withstanding voltage : AC2000V/1Min.
- 5. Operating temperature: -40°C~+105°C
- 6. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range		Tolerance	
Over	TO	Over	TO	Over	TO
6	10	30	60	100	150
6	10	24	30	60	100
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00
				±1.30	±2*

7. RoHS Compliance

DG130 - 7.5/7.62 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch)
 (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange)
 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

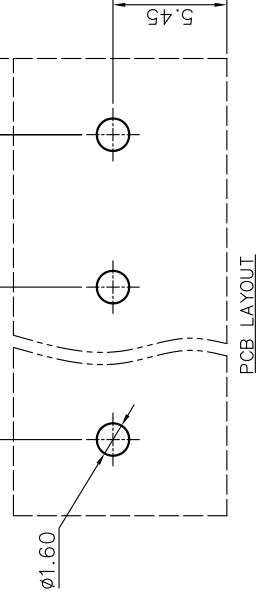

DETACHED LISTS

PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME: DG130-7.5/7.62-XXP-1Y-00A(H)
CHKD:	/	
DRFT:	/	TITLE: CUSTOMER DRAWING
		DRAWING NO.:
		REV
		SHEET
		SCALE
		DO NOT SCALE
		DRAWING
		SCALE

THIRD ANGLE PROJECTION

DRAWING NO.:

CUSTOMER DRAWING

REV DO

SHEET 1/1

SCALE 1:1