



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

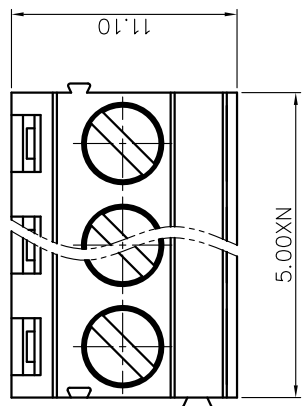

DG130H - 5.0 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch)
 (Color): 1.(Grey) 2.(Black) 3.(Green) 4.(Orange) 5.(White)
 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

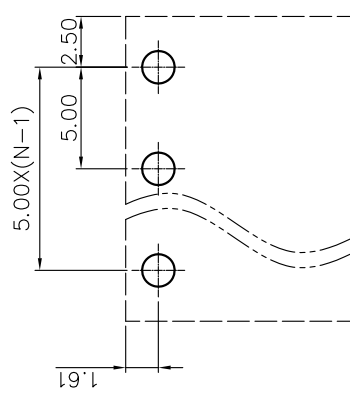




NOTES1:

- UL Standard
 1. Rated voltage/current : 300V / 20A
 2. Torque value : M3, 4.43lb.in
 3. Wire range : 24~12AWG
- IEC Standard
 1. Rated voltage/current : 250V / 24A
 2. Torque value : M3, 0.5N.m
 3. Wire range : 2.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 5.0mm, Poles : N=02~24P
 3. Stripping length : 7mm
 4. Withstanding voltage : AC2500V/1Min.
 5. Operating temperature: -40°C~+105°C
 6. Undimensioned tolerances:
 7. RoHS Compliance

Pitch range in mm	Nominal dimension range		Tolerance
	Over	Under	
6 TO 10	±0.15	±0.20	±0.30
10 TO 24	±0.30	±0.50	±0.70
24 TO 30	±0.50	±0.70	±1.00
30 TO 60	±0.70	±1.00	±1.30
60 TO 150	±1.00	±1.30	±2.00

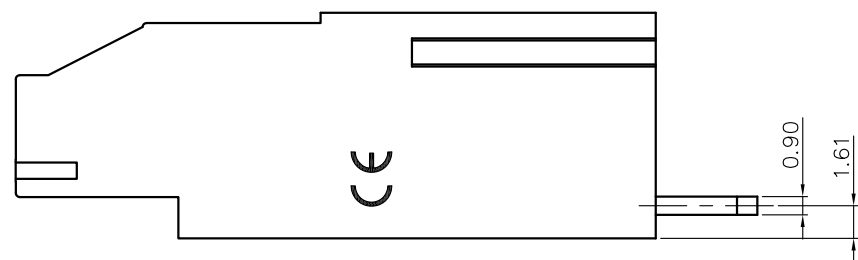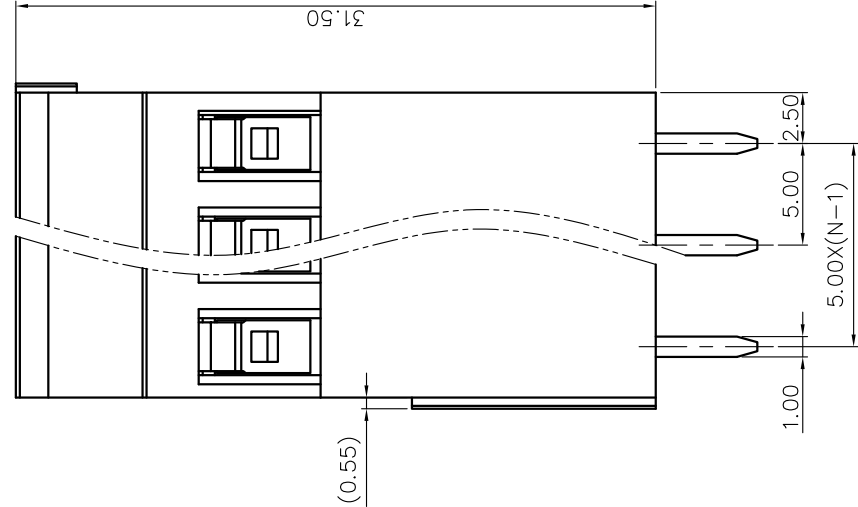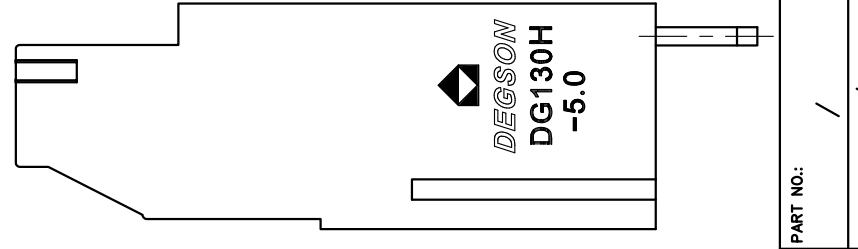

PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME: 宁波高松电子有限公司
CHKD:	/	NAME: DG130H-5.0-XXP-1Y-00A(H)
DRFT:	/	TITLE: CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:
DO NOT SCALE		REV
SCALE		DO
1:1		SHEET
1		SCALE
1		1:1

DETACHED LISTS