
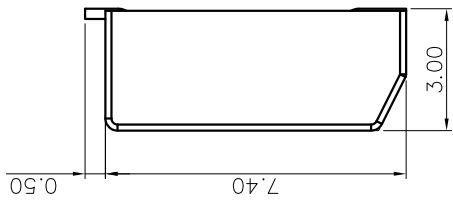
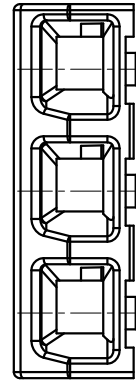
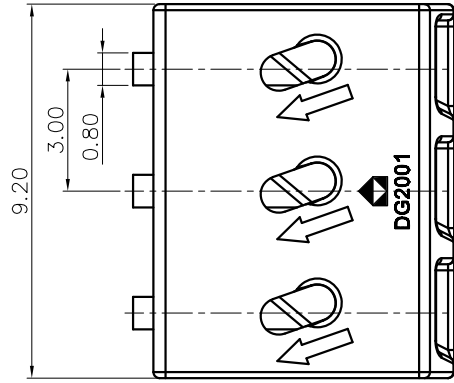

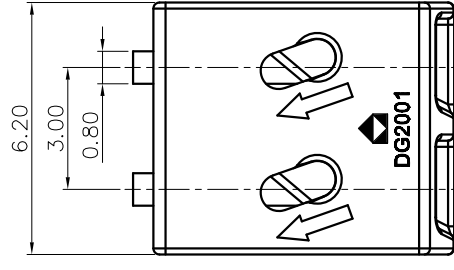



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

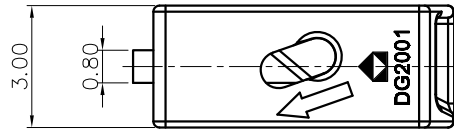

NOTES1:
UL Standard
1. Rated voltage/current : 600V / 3A(01P)、
300V / 3A(02P/03P)
2. Wire range : 26~22AWG
IEC Standard



Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	160V	160V	32V
Rate current(A)	3A		

2. Wire range : 0.14~0.34mm²(SOL)

NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.00mm, Poles : N=01~03P
3. Stripping length : 5.5~6.5mm
4. Operating temperature: -40°C~+130°C
5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		Tolerance
	Over	Over	
6 TO 10	30 TO 60	100 TO 150	0.1/10
6 TO 10	30 TO 60	100 TO 150	<
±0.15±0.20	±0.30±0.50	±0.70±1.00	±1.30 ±2

6. RoHS Compliance

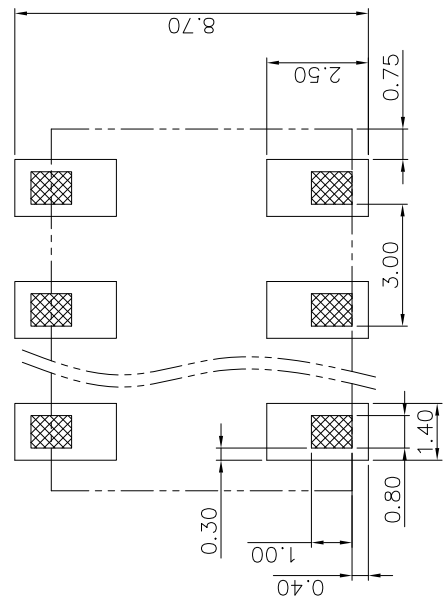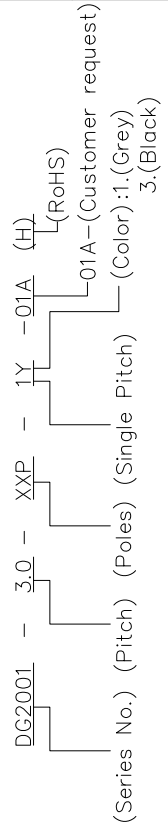

PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME: 宁波高松电子有限公司
CHKD:	/	NAME: DG2001-3.0-XXP-1Y-01A(H)
DRFT:	/	TITLE: CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:
		DO NOT SCALE
SCALE	1:1	SCALE
SHEET	1/1	SHEET
REV		REV
DO		DO