

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:




- UL Standard
- 1.Rated voltage/current : 300V / 22A
- 2.Wire range : 22~12AWG
- IEC Standard
- 1.Rated voltage/current : 450V / 24A
- 2.Wire range : 0.2~2.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 8.00mm, Poles : N=01P
- 3.Stripping length : 9~11mm
- 4.Withstanding voltage : AC2500V/1Min
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		Tolerance	
Over	TO	Over	TO	Over	TO
6	10	30	60	0.1	0.10
10	24	30	60	0.10	0.15
6	10	30	60	±1.00	±1.30
±0.15	±0.20	±0.30	±0.30	±0.70	±1.00
±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

7.RoHS Compliance

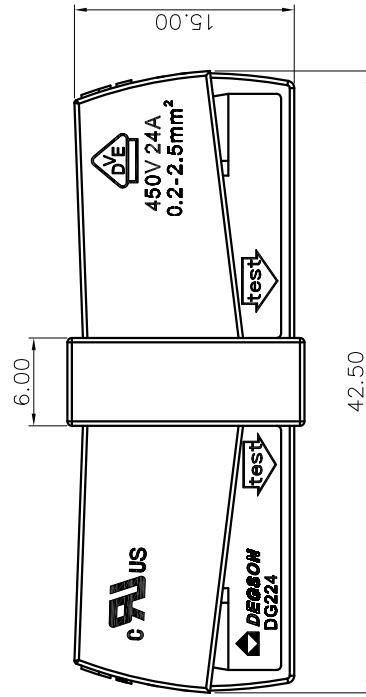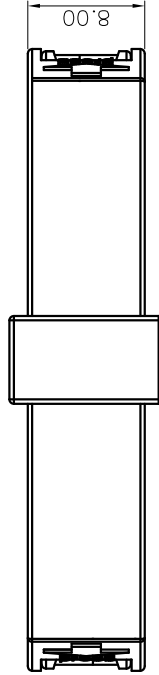

DG224 - 8.0 - 01P - 1Y - 00A (H)

- (Series No.)(Pitch) (Poles) (Single Pitch) (Color):
- (Grey)
 - (Blue)
 - (Black)
 - (Green)
 - (Orange)
 - (Red)
 - (Transparent)
 - (Yellow)
 - (White)

PART NO.: /		DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: /	NAME: DG224-8.0-01P-1Y-00A(H)	REV DO	
CHKD: /	TITLE: CUSTOMER DRAWING	1/1	
DRFT: /	DRAWING NO.: /	SCALE	
THIRD ANGLE PROJECTION		1:1	

DETACHED LISTS