
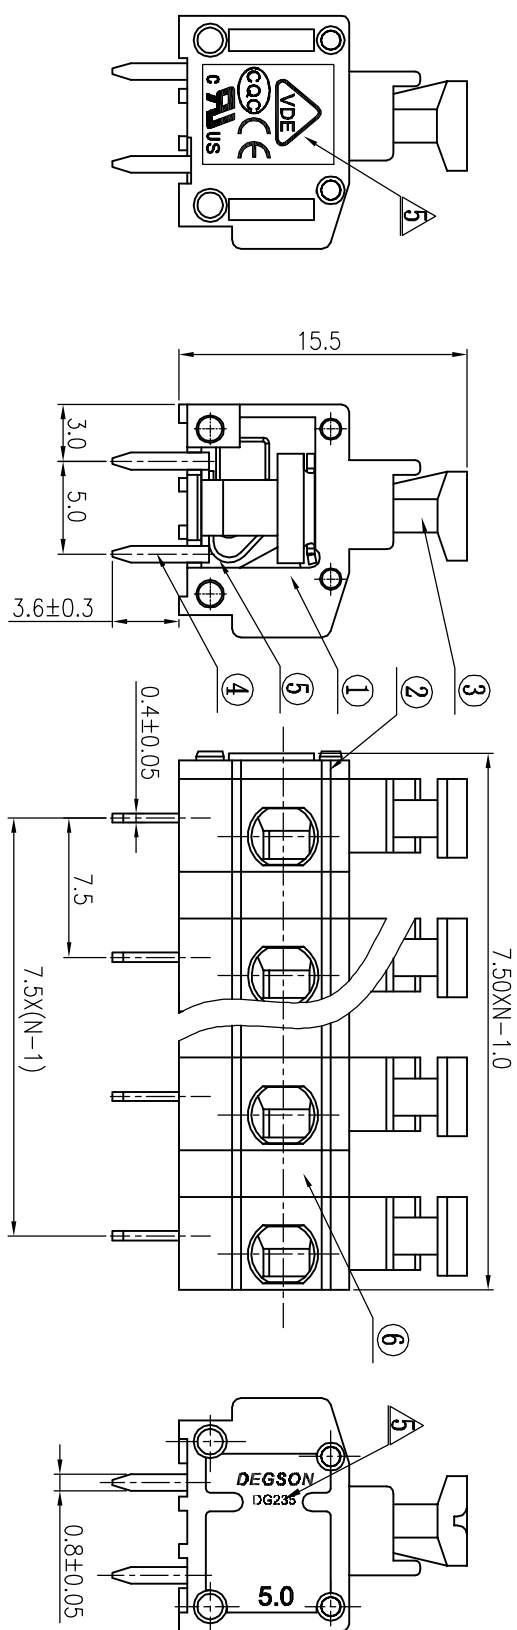


REVISION RECORD

REV	ECN	DESCRIPTION	DW'T	DATE
△		图面更新	HW	04/11/08*
△		图面更新	WF	01/31/07*
△		品名、料号增加环保标示“(0)”	LJH	12/08/07*
△		修改列字	LJH	10/30/08*
△	10-0333	修改参数	ZXX	10/04/10*

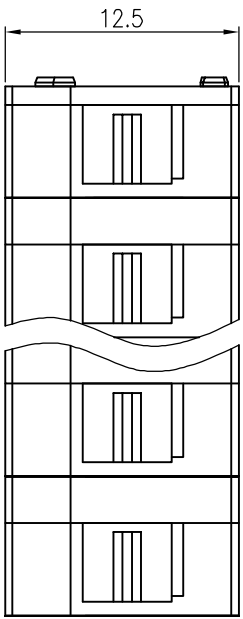

Notes:

1. Pitch: 7.5mm, Poles: 2-XXP
2. Rated voltage/current: UL 300V/5A
VDE 450V/15A △
3. Operation temperatures: -40°C~+105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ /DC1000V
6. Wire Range: 20~18AWG, 0.2~1.5mm² (str) △
0.2~2.5mm² (sol)
7. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm
over 6 to 10	over 30 to 60
over 10 to 15	over 60 to 100
over 15 to 24	over 100 to 150
±0.10	±0.15
±0.25	±0.2
±0.3	±0.5
±0.7	±1.0
□	□

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
6	DG235-Calpboard	3008H0Y01A(H)	XX-1	PA66	UL94V-0
5	DG235-5-0-Spring	X000000140(H)	XX	Stainless Steel	
4	DG235-5-0-Pin header	3008B00010(H)	XX	Phosphor Bronze	SnCe
3	DG235-5-0 Button	3008D0Y01A(H)	XX	PA66	UL94V-0
2	DG235-5-0 Cover	3008C0Y01A(H)	1	PA66	UL94V-0
1	DG235-5-0 Housing	3008A0Y01A(H)	XX	PA66	UL94V-0

DETACHED LISTS	
TOLERANCES EXCEPT AS NOTED	FINISH:
MM	0 ±
MM	0.00 ±
MM	0.00 ±
ANGLES ± 1°	G.E.:
THIRD ANGLE PROJECTION	SCALE: 1:1

DEGSON	宁波德正电子有限公司
DEGSON	DEGSON ELECTRONICS CO., LTD
NAME	DG235-7.5-XXP-1Y-00A(H)
DRAWING NO.	DG235-7.5-E01
/PART NO.	
DO NOT SCALE DRAWING	
SHEET 1	OF 1

8 7 6 5 4 3 2 1