
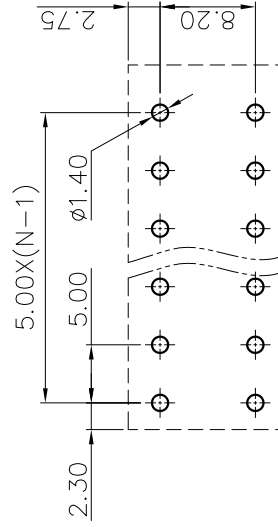
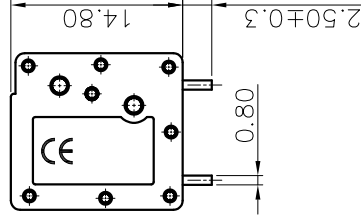
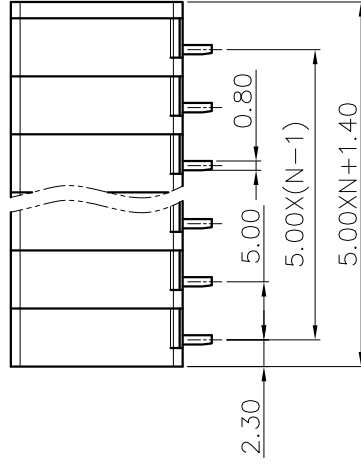



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

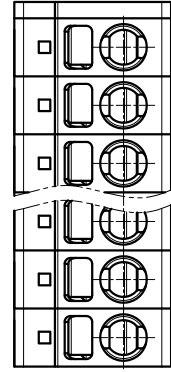

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 20A
- 2. Withstanding voltage : AC1600V/1Min.
- 3. Wire range : 24~12AWG

IEC Standard

Pollution degree	2	2	3
Overvoltage category	III	III	II
Rate impulse voltage(KV)	4.0KV	4.0KV	4.0KV
Rate voltage(V)	630V	400V	250V
Rate current(A)	24A		


- 1. Wire range : 0.2~4.0mm<sup>2</sup>(SOL)  
0.2~2.5mm<sup>2</sup>(STR)

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.00mm, Poles : N=01~XXP
- 3. Stripping length : 10mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range			
	Over	Over	Over	Over
6 TO 10	10	30	60	100
10 TO 24	24	30	60	100
±0.15	±0.20	±0.30	±0.50	±1.00
				±1.30
				±2*

6. RoHS Compliance

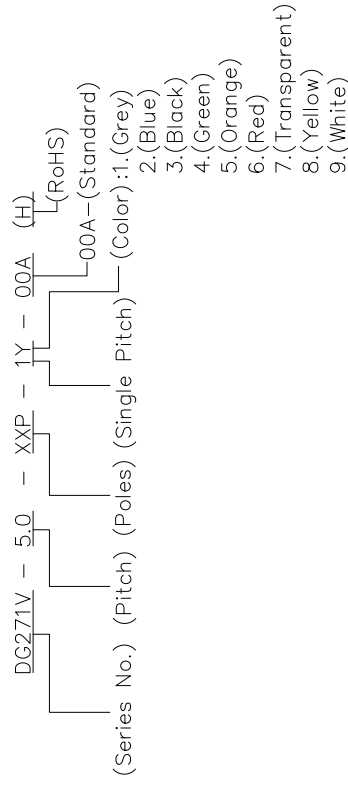

PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME: DG271V-5.0-XXP-1Y-00A(H)
CHKD:	/	TITLE: CUSTOMER DRAWING
DRFT:	/	DRAWING NO.: /
THIRD ANGLE PROJECTION	3	DO NOT SCALE DRAWING
DETACHED LISTS	4	SCALE 1:1