
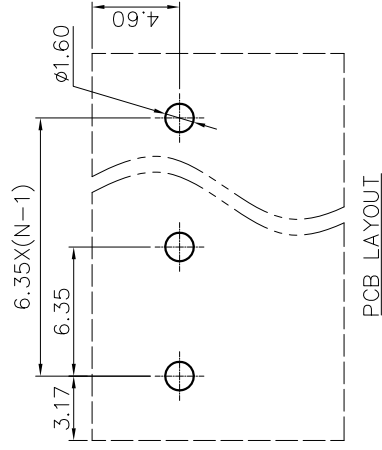
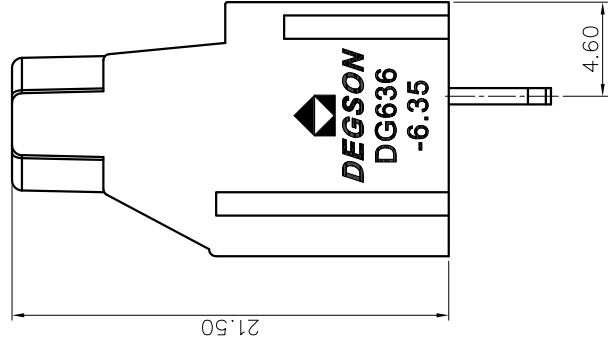
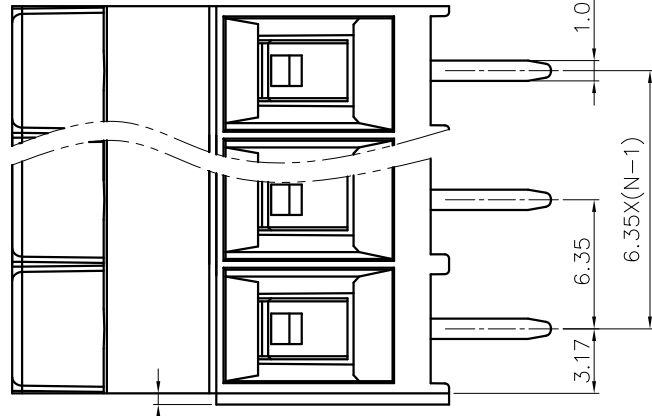
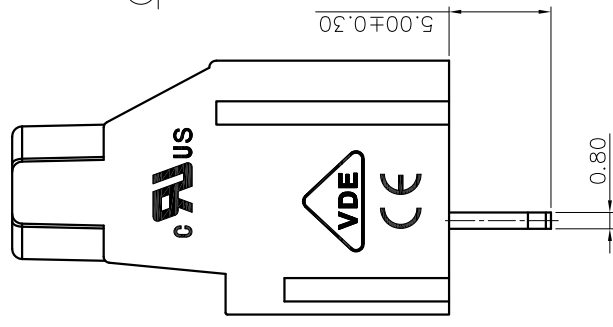


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

DG636 - 6.35 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch)
 (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange)
 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

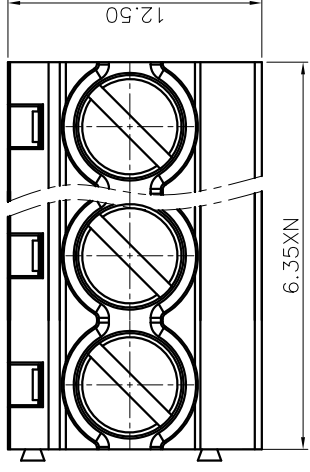

NOTES1:

- UL Standard
- 1.Rated voltage/current : 300V / 30A
- 2.Torque value : M3 , 4.43Lb.in
- 3.Wire range : 26~10AWG

IEC Standard

- 1.Rated voltage/current : 450V / 24A
- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 1.5~4.0mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 6.35mm, Poles : N=02~24P
- 3.Stripping length : 8mm
- 4.Withstanding voltage : AC2500V/1Min.
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm	
Over	To	Over	To
6	10	30	60
10	24	60	100
24	30	100	150
30	60	150	∞
∞	∞	±0.15	±0.20
∞	∞	±0.30	±0.50
∞	∞	±0.70	±1.00
∞	∞	±1.30	±2.0

7.RoHS Compliance

PART NO. /		NINGBO DEGSON ELECTRICAL CO., LTD	
APPD. /		NAME: 宁波高松电子有限公司	
CHKD. /		NAME: DG636-6.35-XXP-1Y-00A(H)	
DRFT. /		TITLE: CUSTOMER DRAWING	
THIRD ANGLE PROJECTION		DRAWING NO. /	
DO NOT SCALE		REV DO	
SCALE 1:1		SHEET 1/1	