
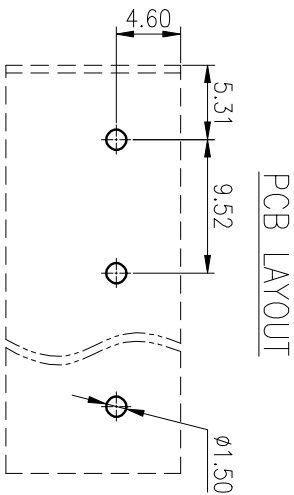
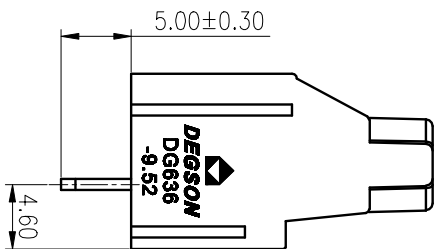
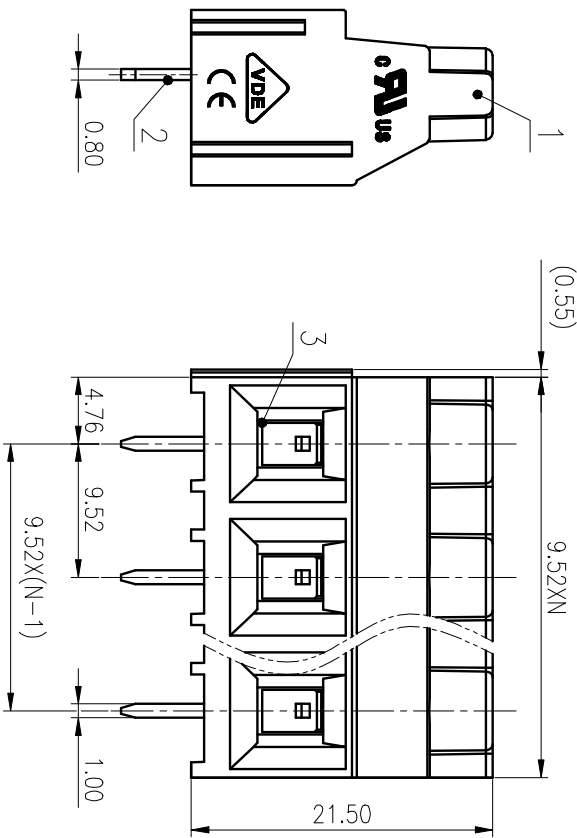


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	280	315	400	500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

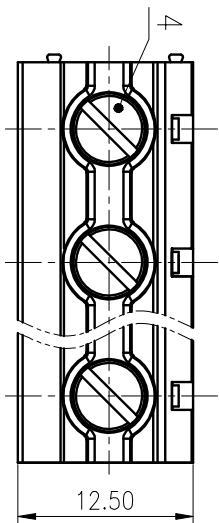

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Steel	M3/7n Plated
3	Cage	Copper alloy	M3/Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准	UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/30	/	/	300/10
IEC 标准 /IEC Standard:	III/2			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2			
额定电压/电涌/Rated Voltage(V)/Current(A)	1000/32			
工续耐压/Withstanding voltage(V/1Min)	AC3500			
螺栓扭矩/Torque Tightening(N·m/Lbin)	M3, 0.5/4.43			
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~4.0mm ² (str) 0.2~6.0mm ² (sol)			
间距/Pitch(mm)/线数范围/Poles	9.52/N=2~24P			
剥线长度/Stripping length(mm)	8~9			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS环保要求/Conform to RoHS	Yes			

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD: LanCH	2020.03.21
CHKD: YUJZ	2020.03.21
DRT: CGM	2017.03.06
SIZE: A4	(mm) (inch)
TYPE: CUSTOMER DRAWING	SCALE: 2:1 SHEET 1/1

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
宁波高松电子有限公司
 DG636-9.52-XXP-1Y-00A(H)

REV	ECN	DESCRIPTION	DRT	DATE
1				
2				
3				
4				