
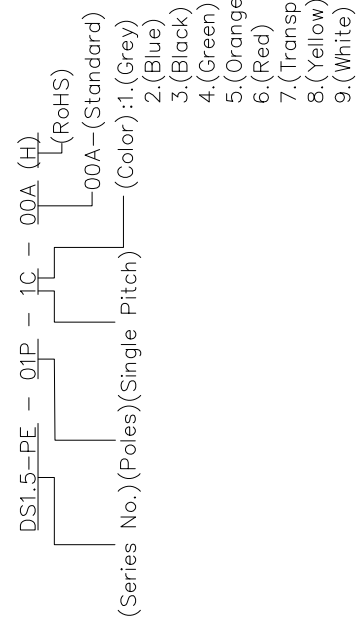
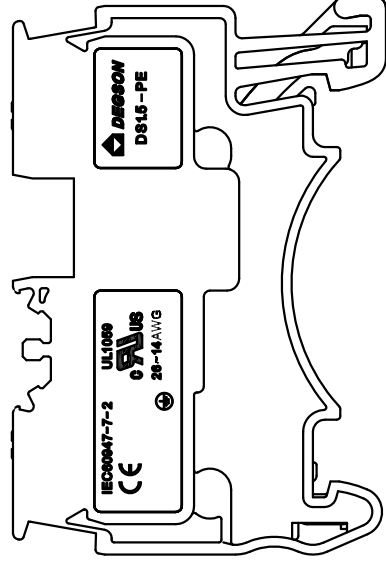
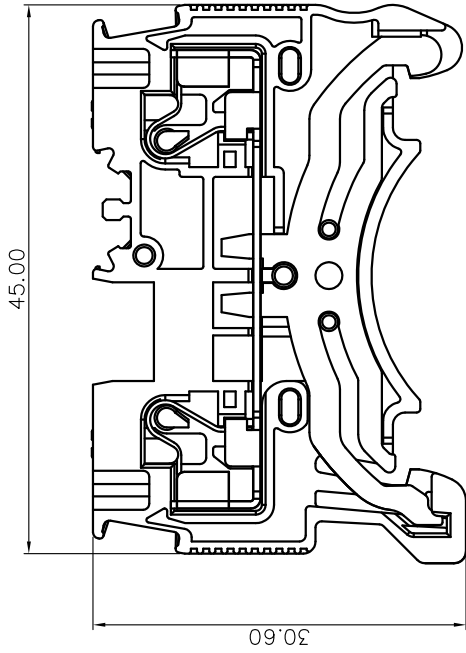


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



NOTES2:
 1.Dimension shall be interpreted per ASME Y14.5-2009
 2.Pitch : 3.5mm, Poles : 01P
 3.Stripping length : 8~10mm
 4.Operating temperature: -40°C~+105°C
 6.Undimensioned tolerances:

Pitch	Range		Nominal Dimension		Range		Tolerance
	mm	In	mm	In	mm	In	
Over	6	10	30	60	100	150	0.1/10
TO	6	10	24	30	60	100	±
	±0.15	±0.20	±0.30	±0.30	±0.50	±1.00	±1.30 ±2'

NOTES1:
 UL Standard
 1.Wire range : 26~16AWG&14AWG (Sol)
 IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	6.0KV
Rate voltage(V)	/
Rate current(A)	/

2.Wire range : 0.2~1.5mm²

PART NO.:	/	DEGSON®	NINGBO DEGSON ELECTRICAL CO., LTD	宁波高松电子有限公司
APPD:	/	NAME:	DS1.5-PE-01P-1C-00A(H)	
CHKD:	/	TITLE:	CUSTOMER DRAWING	REV DO
DRFT:	/	DRAWING NO.:	/	SHEET
		THIRD ANGLE PROJECTION	DO NOT SCALE	DRAWING SCALE
			1:1	1:1

DETACHED LISTS