

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

NOTES:

UL Standard

1. Rated Voltage/Current : 600V / 60A
2. Withstanding Voltage : AC2200V/1Min.
3. Wire Range : 20~6AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	8.0KV
Rate Voltage(V)	1000V
Rate Current(A)	57A



2. Wire Range : 0.5~10mm²&16mm²(sol)

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 10.2mm, Poles : N=01P
3. Stripping length : 16-18mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned Tolerances:

Pitch Range	In mm		Nominal Dimension		Range	
	Over	Under	In	mm	Over	Under
6	10	TO	30	TO	100	150
	10	24	30	TO	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
	±1.30	±2	±2	±2	±2	±2

6. RoHS Compliance

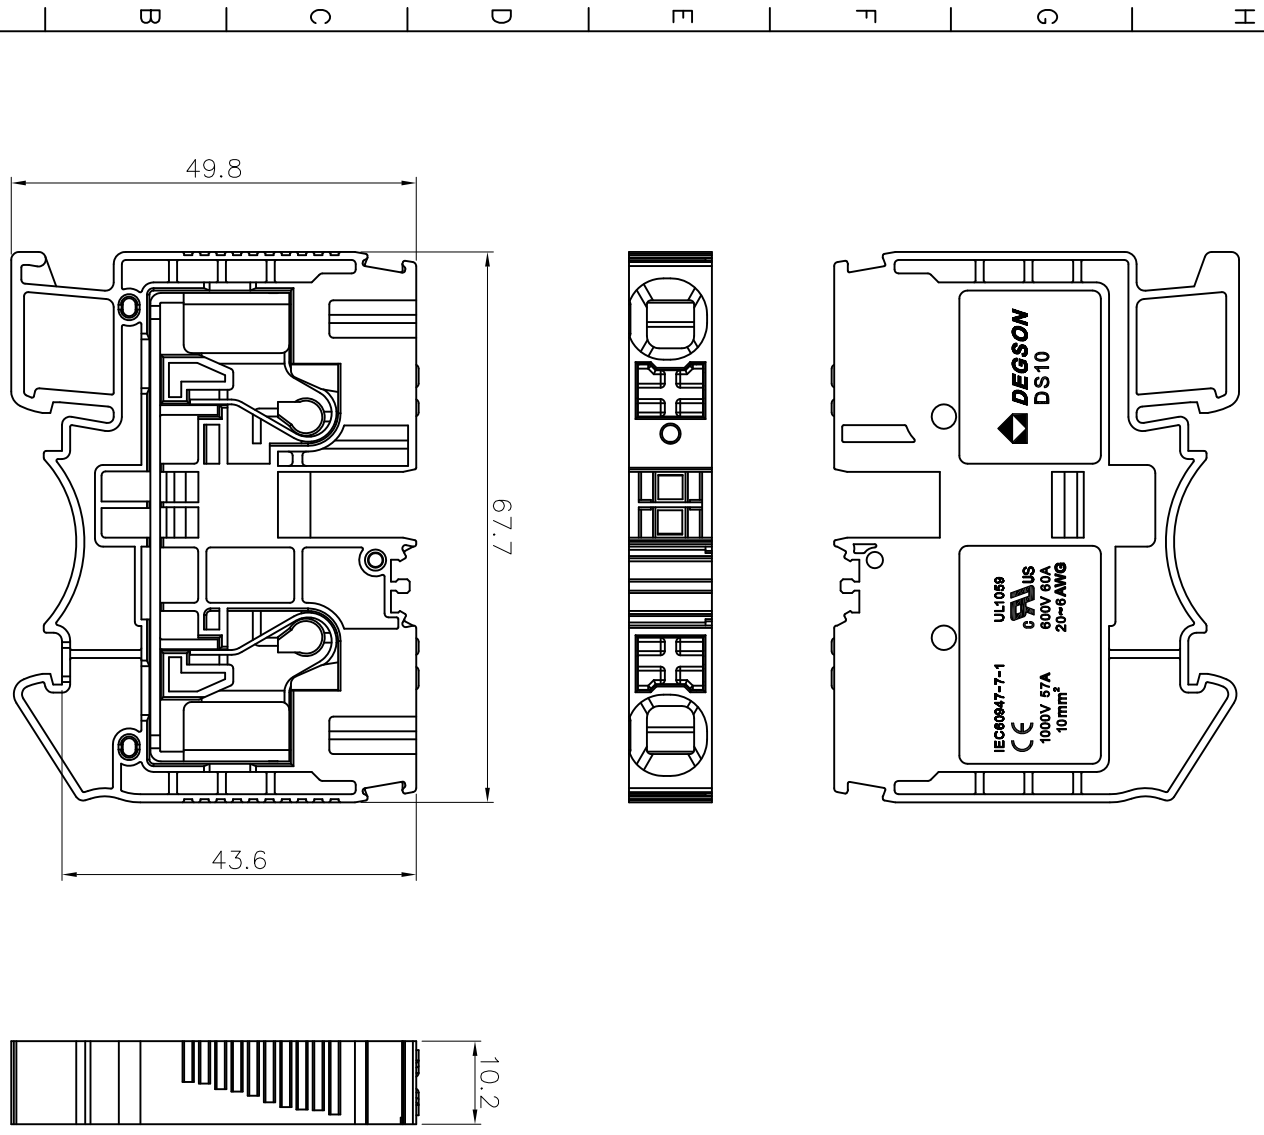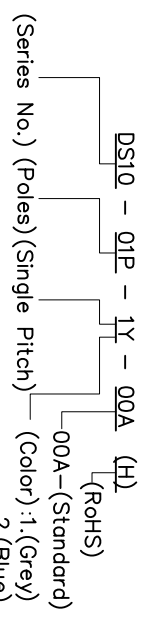

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON ® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	NAME:	DS10-01P-1Y-00A(H)
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
REV	DO	SHEET	1/1
SCALE	1:1		