
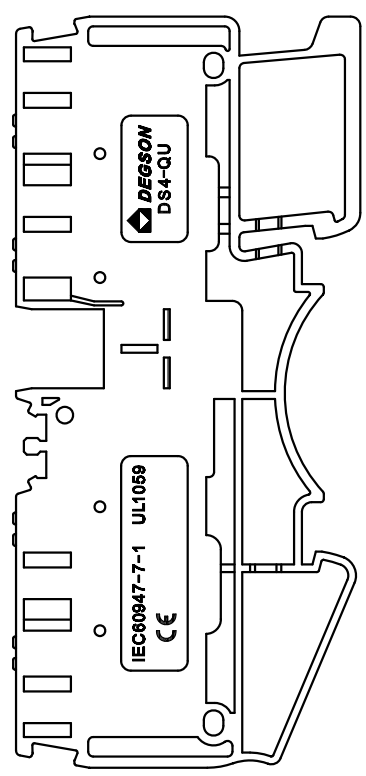


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

DS4-QU - 01P - 1Y - 00A (H)
 (Series No.) (Poles) (Single Pitch) (RoHS)
 -00A-(Standard)
 (Color): 1.(Grey) 6.(Red)
 2.(Blue) 7.(Transparent)
 3.(Black) 8.(Yellow)
 4.(Green) 9.(White)
 5.(Orange)

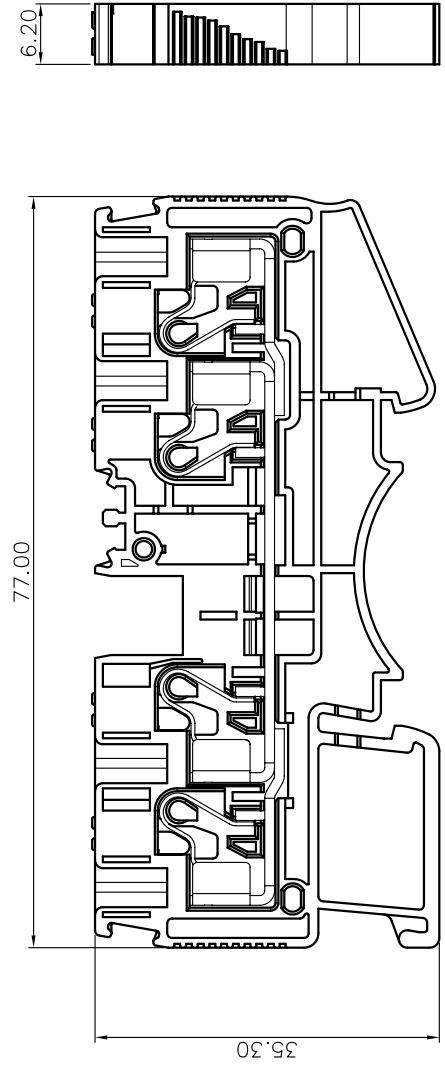

NOTES1:
 UL Standard
 1. Rated voltage/current : 600V / 28A
 2. Withstanding voltage : AC2200V/1Min.
 3. Wire range : 24~10AWG

NOTES2:

- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 6.20mm, Poles : 01P
- Stripping length : 10~12mm
- Operating temperature: -40°C~+105°C
- Undimensioned tolerances:

Pitch range in mm	Nominal dimension range			
	Over	Over	Over	Over
6 TO 6	10	30	60	100
6 TO 10	24	30	60	100
±0.15	±0.20	±0.30	±0.50	±1.00
				±1.30
				±2*

IEC Standard

- | | |
|--------------------------|-------|
| Pollution degree | 3 |
| Overvoltage category | III |
| Rate impulse voltage(KV) | 8.0KV |
| Rate voltage(V) | 800 V |
| Rate current(A) | 32 A |

2. Wire range : 0.2~4mm²

PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD
NAME:	DS4-QU-01P-1Y-00A(H)	
APPD:	/	
CHKD:	/	
DRFT:	/	
TITLE:	CUSTOMER DRAWING	REV DO
DRAWING NO.:	/	SHEET 1/1
THIRD ANGLE PROJECTION	DO NOT SCALE	DRAWING SCALE 1:1

DETAILED LISTS